


Aroclor 1242/1254/1262 PCBs
Rtx®-PCB

restek
innovation!

The Rtx®-PCB column offers excellent resolution for PCB congeners.

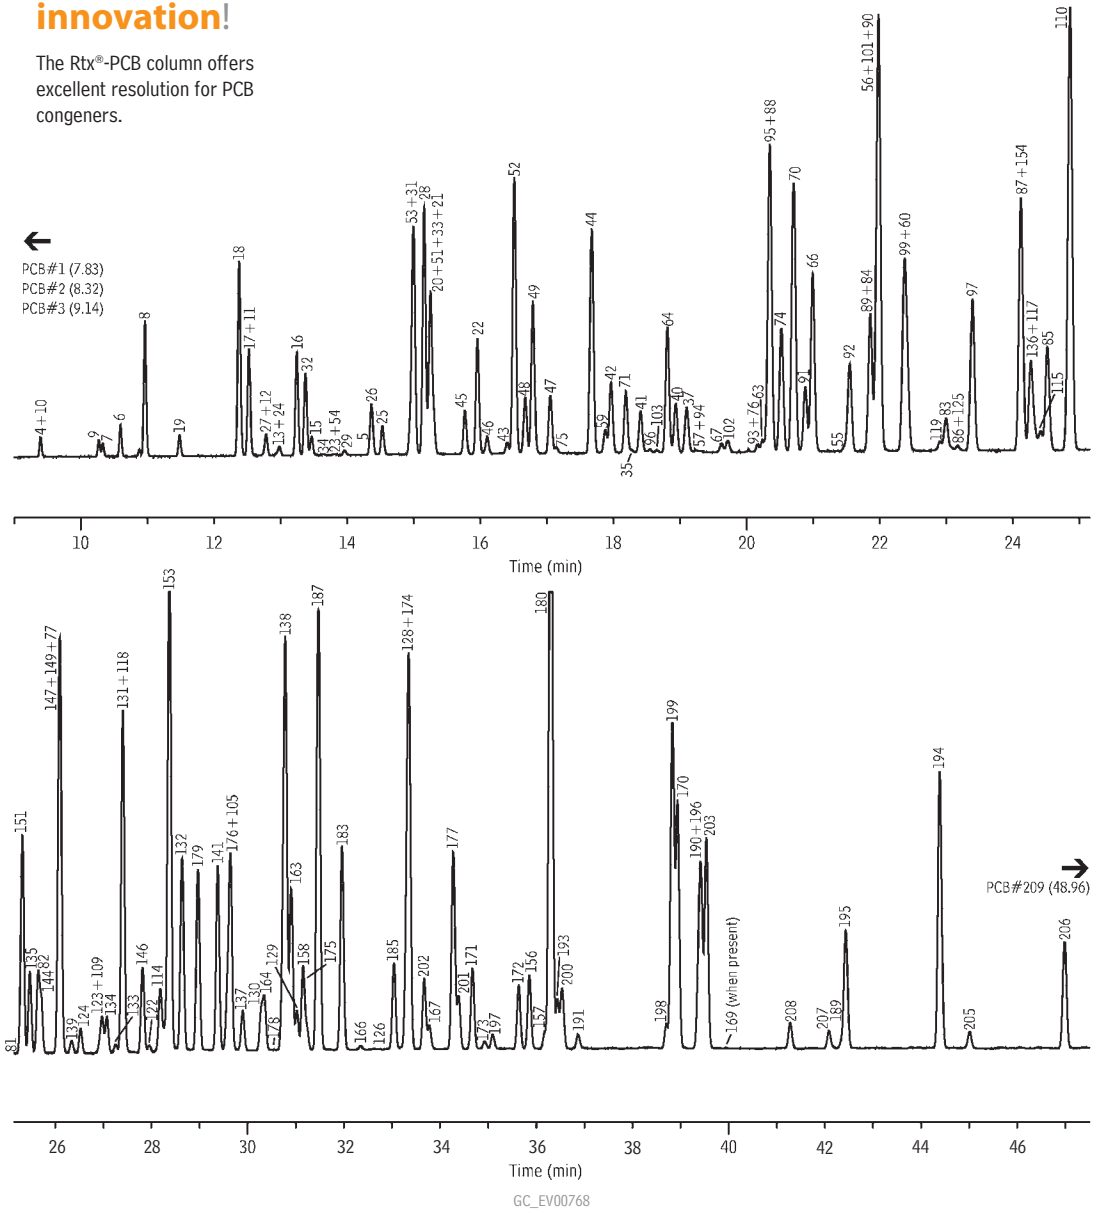

Column: Rtx®-PCB, 40m, 0.18mm ID, 0.18µm (cat.# 41303)
 Sample: 300ng/mL Aroclor 1242/1254/1262 in hexane: Aroclor 1242 (cat.# 32009), Aroclor 1254 (cat.# 32011), Aroclor 1262 (cat.# 32409)
 Inj.: 1.0µL splitless (hold 0.75 min.), 4mm single gooseneck inlet liner (cat.# 20983)
 Inj. temp.: 230°C
 Carrier gas: hydrogen, constant pressure
 Linear velocity: 40cm/sec. @ 100°C
 Oven temp.: 100°C (hold 1 min.) to 200°C @ 30°C/min., to 320°C @ 2°C/min. (hold 1 min.)
 Det.: ECD @ 330°C

GC APPLICATIONS | ENVIRONMENTAL

HRoMalytic Chromatography Products '08
 Australian Distributors **ECHnology**

