


Selectors – Low Pressure

Common outlet flowpath – SC configuration

SC selectors are similar to the SD configuration, except that instead of being dead-ended the non-selected streams flow to a common outlet. For an application suggestion, see page 135.

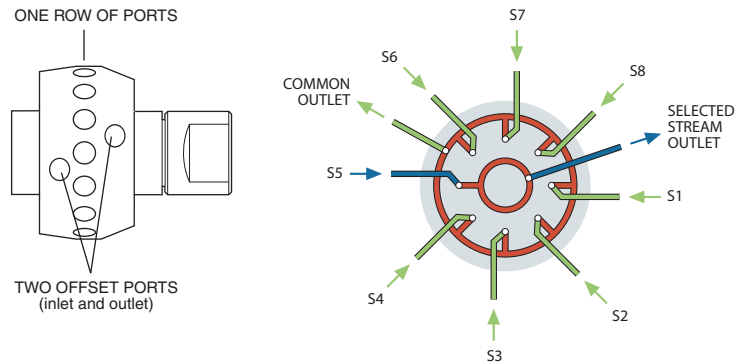

1/16" fittings, 1.0 mm ports (.040")

MW Type

Low pressure

SC Common outlet

1/16" 1.0 mm

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.


Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

SPECS
 200 psi gas
 200°C max
 Nitronic 60 body
 Valcon E rotor

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2CSC6MWE		2CSC10MWE		2CSC12MWE		2CSC16MWE	
With air actuator	A2CSC6MWE		A2CSC10MWE		A2CSC12MWE		A2CSC16MWE	
With standard electric actuator	E2CSC6MWE		E2CSC10MWE		E2CSC12MWE		E2CSC16MWE	
With microelectric actuator	EMT2CSC6MWE		EMT2CSC10MWE		EMT2CSC12MWE		EMT2CSC16MWE	
Replacement valve	DCSC6MWE		DCSC10MWE		DCSC12MWE		DCSC16MWE	
Replacement rotor	SSACSC6MWE		SSACSC10MWE		SSACSC12MWE		SSACSC16MWE	

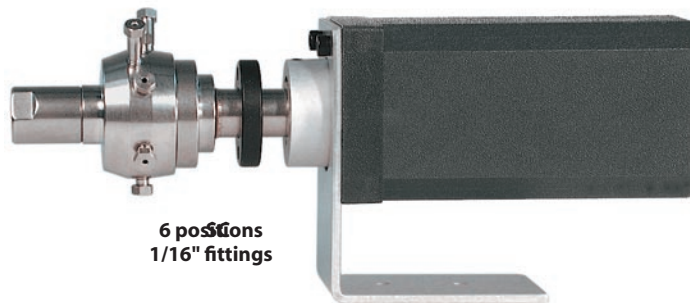

MORE INFORMATION

Application. page 135

Actuators

- Air 194
- Microelectric 190-191
- Standard elec. 193

Materials

- Metals. 254-255
- Polymers 256
- Valve rotors. 257

Mounting hardware

- Closemount 208
- Standoff. 205