



## NUTECH HEATED MANIFOLD FOR SEMI-VOLATILE APPLICATIONS

The Nutech Heated Manifold is designed for a special application for semi volatile compound analysis.



### APPLICATION


- For semi volatile compounds analysis using a preconcentration system such as cryogenic system or thermal desorption system.

### FEATURES

- 1, 2, 4, and 16 positions are available.
- Each canister is individually enclosed and heated.
- All sample lines are heated from end to end leading to the instrument inlet.
- Independent temperature control system can control temperature from 25°C to 300°C.
- Easily fits canisters up to 6 liters.

### SPECIFICATIONS

- Canister heating jacket 23" (D) × 20" (H)
- Temperature control range: room temperature 25°C to 300°C
- Temperature control accuracy : +/- 2°C
- 110V/60Hz, (220V/50Hz optional) +/- 10% with max 500W power supplies
- Working condition: 0°C to 40°C with < 90% RH
- Weight: 10 lbs.

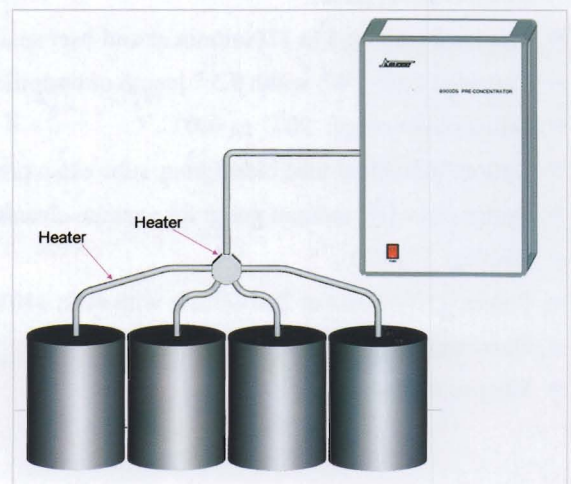

Headquarters: GD Environmental Supplies, Inc.  
651 N. Plano Rd. #429, Richardson TX 75081  
E-mail: drdai@gdair.com  
Website: www.nutechins.com, T: 972 480 8908; F: 972 480 8308

13

Sales Office: New Star Environmental, Inc.  
3293 Ashburton Chase NE, Roswell GA 30075  
E-mail: Sales@NewStarEnvironmental.com  
Website: www.NewStarEnvironmental.com, T: 770 998 0296; F: 770 998 9794