

**Sampling and switching valves, 1/16" fittings, 0.75 mm ports (.030")**

*UW Type*

**SPECS**

**400 psi gas  
225°C max**

Nitronic 60 valve body  
Valcon E rotor

For 300 psi, 330°C max,  
see page 109.

Includes 4" standoff.  
Manual version has no  
standoff.

Standard electric actuator:  
110 VAC for USA  
110/230 VAC to 24 VDC power supply  
for international

Microelectric actuator:  
24 VDC, with 110/230 VAC to 24 VDC  
power supply

Sample loops are not  
included with valves.  
Order separately.

**Med temp**  
**1/16" 0.75 mm**

**OPTIONS**

- 3, 12 and 14 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)
- Larger bore available

- Manual
- Manual with standoff
- With air actuator
- With standard electric actuator
- With microelectric actuator
- Replacement valve
- Replacement rotor



**4 Ports**

Prod No Price



**6 Ports**

Prod No Price



**8 Ports**


Prod No Price



**10 Ports**

Prod No Price

C4UWE	C6UWE	\$570	C8UWE	C10UWE
4C4UWE	4C6UWE	615	4C8UWE	4C10UWE
A4C4UWE	A4C6UWE	775	A4C8UWE	A4C10UWE
E4C4UWE	E4C6UWE	1095	E4C8UWE	E4C10UWE
ED4C4UWE	ED4C6UWE	1325	ED4C8UWE	ED4C10UWE
DC4UWE	DC6UWE	525	DC8UWE	DC10UWE
SSAC4UWE	SSAC6UWE	75	SSAC8UWE	SSAC10UWE

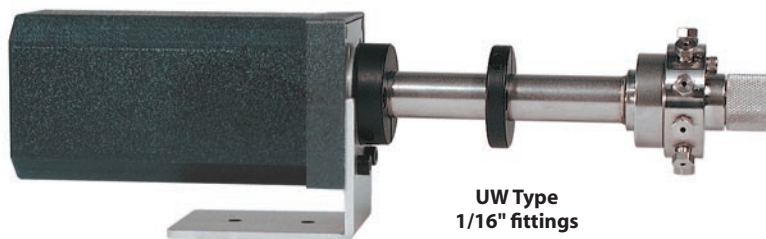

**UW Type  
1/16" fittings**

**1/16" Stainless steel loops**

*for UW Type valves*

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Price	Volume	Prod No	Price
5 µl	SL5CUW		100 µl	SL100CUW	
10 µl	SL10CUW		250 µl	SL250CUW	
15 µl	SL15CUW		500 µl	SL500CUW	
20 µl	SL20CUW		1 ml	SL1KCUW	
25 µl	SL25CUW		2 ml	SL2KCUW	
50 µl	SL50CUW		5 ml	SL5KCUW	
			10 ml	SL10KCUW	

**ABOUT LOOPS**

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.