

High Temperature GC

Sampling and switching valves, 1/16" fittings, 0.40 mm ports (.016")

W Type

High temp
1/16" 0.40 mm

Includes 4" standoff

Standard electric actuator:
110 VAC for USA
110/230 VAC to 24 VDC power supply
for international
Microelectric actuator:
24 VDC, with 110/230 VAC to 24 VDC
power supply

Sample loops are not
included with valves.
Order separately.

SPECS

300 psi gas
350°C max
Nitronic 60 valve body
Valcon T rotor

For 400 psi, 225°C max,
see page 106.



4 Ports

Prod No Price



6 Ports

Prod No Price



8 Ports

Prod No Price



10 Ports

Prod No Price

Manual with standoff
With air actuator

4C4WT
A4C4WT

4C6WT
A4C6WT

4C8WT
A4C8WT

4C10WT
A4C10WT

With standard electric actuator
With microelectric actuator

E4C4WT
EH4C4WT

E4C6WT
EH4C6WT

E4C8WT
EH4C8WT

E4C10WT
EH4C10WT

Replacement valve
Replacement rotor

DC4WT
SSAC4WT


DC6WT
SSAC6WT

DC8WT
SSAC8WT

DC10WT
SSAC10WT

OPTIONS

- 3 and 12 port valves available
UW type: 3, 12, and 14 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-255)

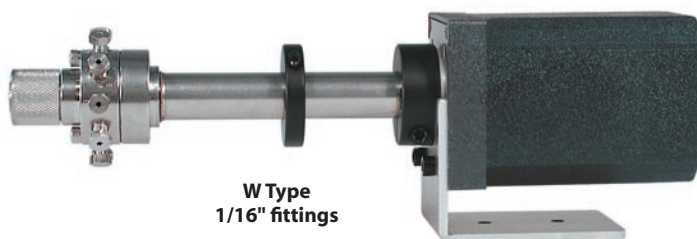

W Type
1/16" fittings

1/16" Stainless steel loops

for W Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Price	Volume	Prod No	Price
2 µl	SL2CW		100 µl	SL100CW	
5 µl	SL5CW		250 µl	SL250CW	
10 µl	SL10CW		500 µl	SL500CW	
15 µl	SL15CW		1 ml	SL1KCW	
20 µl	SL20CW		2 ml	SL2KCW	
25 µl	SL25CW		5 ml	SL5KCW	
50 µl	SL50CW		10 ml	SL10KCW	

MORE INFORMATION

- Actuators
- Air page 195
 - Manual 204
 - Microelectric .. 188-189
 - Standard elec. 193
- Materials
- Metals 254-255
 - Polymers 256
 - Valve rotors. 257
- Standoff assemblies 205

ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.