


Selectors – Low Pressure

Dead-end flowpath – SD configuration

SD valves select one of 4 to 16 dead-ended streams. The selected stream flows from the outlet to a sample valve, pressure sensor, detector, column, etc. The same flowpath can also be used to direct one stream to a number of outlets in applications such as fraction collection. For an application suggestion, see page 134.

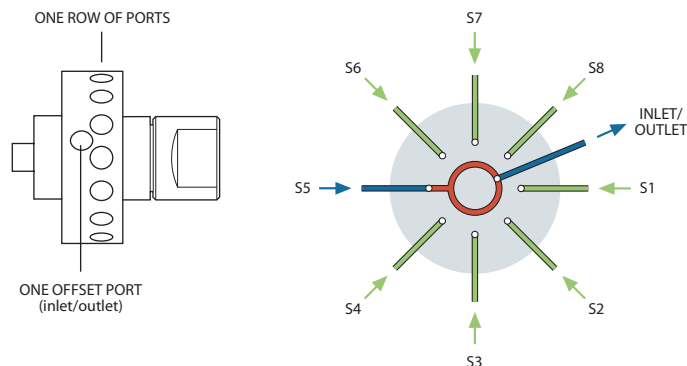

1/16" fittings, 0.75 mm ports (.030")

MWType

Low pressure
SD Dead-end
1/16" 0.75 mm


Includes 2" standoff. Ask about closemount assembly if valve will not be heated.
 Standard electric actuators: 110 VAC for USA, 110/230 VAC to 24 VDC power supply for international
 Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

SPECS
400 psi gas
200°C max
 Nitronic 60 body
 Valcon E rotor

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available except 16 position

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2CSD6MWE		2CSD10MWE		2CSD12MWE		2CSD16MWE	
With air actuator	A2CSD6MWE		A2CSD10MWE		A2CSD12MWE		A2CSD16MWE	
With standard electric actuator	E2CSD6MWE		E2CSD10MWE		E2CSD12MWE		E2CSD16MWE	
With microelectric actuator	EMT2CSD6MWE		EMT2CSD10MWE		EMT2CSD12MWE		EMT2CSD16MWE	
Replacement valve	DCSD6MWE		DCSD10MWE		DCSD12MWE		DCSD16MWE	
Replacement rotor	SSACSD6MWE		SSACSD10MWE		SSACSD12MWE		SSACSD16MWE	

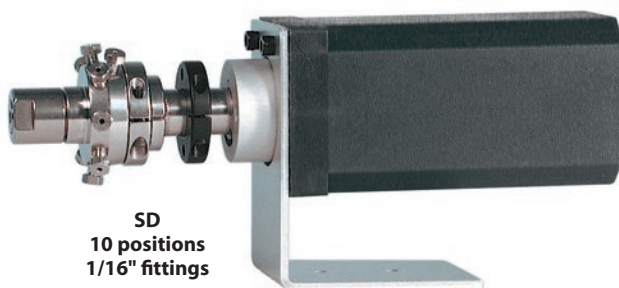

MORE INFORMATION

Application..... page 134
 Actuators
 Air194
 Microelectric .. 190-191
 Standard elec.....193
 Materials
 Metals..... 254-255
 Polymers256
 Valve rotors.....257
 Mounting hardware
 Closemount208
 Standoff.....205