


Selectors – Low Pressure

Flow-through flowpath – SF configuration

SD and SC valves select and isolate one of 4 to 16 streams, with the remainder dead-ended in the SD and flowing to a common outlet in the SC. The SF selector is similar, but carries the evolution a step further with the non-selected streams flowing through individual outlets. For an application suggestion, see page 136.

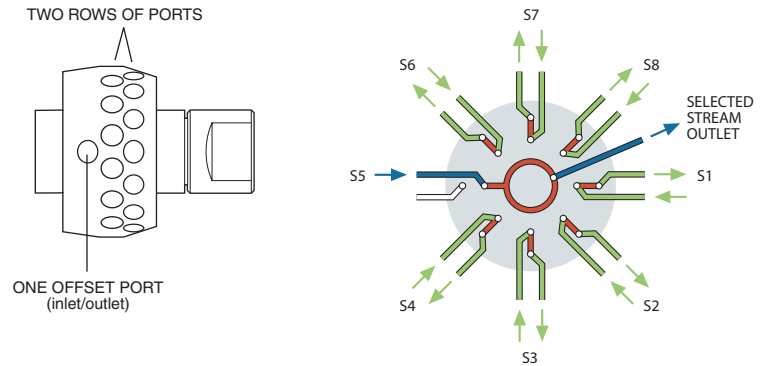

1/16" fittings, 1.0 mm ports (.040")

MW Type

Low pressure

SF Flow-through

1/16" 1.0 mm

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.


Standard electric actuators:
 110 VAC for USA
 110/230 VAC to 24 VDC power supply for international
 Microelectric actuators:
 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

SPECS
 200 psi gas
 200°C max
 Nitronic 60 body
 Valcon E rotor

OPTIONS

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

	6 Position		10 Position		12 Position		16 Position	
	Prod No	Price	Prod No	Price	Prod No	Price	Prod No	Price
Manual (not recommended)	2CSF6MWE		2CSF10MWE		2CSF12MWE		2CSF16MWE	
With air actuator	A2CSF6MWE		A2CSF10MWE		A2CSF12MWE		A2CSF16MWE	
With standard electric actuator	E2CSF6MWE		E2CSF10MWE		E2CSF12MWE		E2CSF16MWE	
With microelectric actuator	EMT2CSF6MWE		EMT2CSF10MWE		EMT2CSF12MWE		EMT2CSF16MWE	
Replacement valve	DCSF6MWE		DCSF10MWE		DCSF12MWE		DCSF16MWE	
Replacement rotor	SSACSF6MWE		SSACSF10MWE		SSACSF12MWE		SSACSF16MWE	

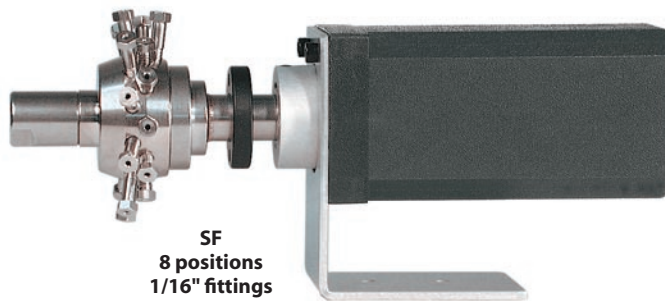

MORE INFORMATION

Application..... page 136

Actuators

- Air194
- Microelectric .. 190-191
- Standard elec.....193

Materials

- Metals..... 254-255
- Polymers256
- Valve rotors.....257

Mounting hardware

- Closemount208
- Standoff.....205