




Injectech

Trusted Biomedical Components

Plastic Fluid Control Components Catalog | v.011

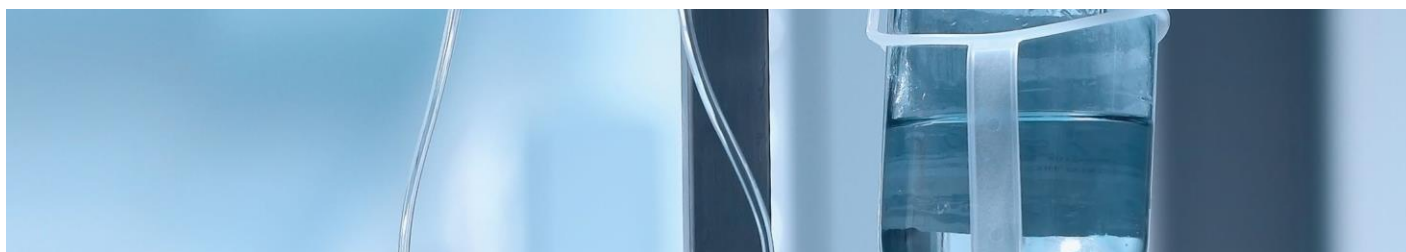

Australian Reseller :



Chromalytic

specialists in chromatography



To order and for more information, email us at : sales@chromtech.net.au
Web : <https://www.chromalytic.net.au> | Tel : +61-3-9762-2034

 **Chromalytic**
specialists in chromatography

Product Portfolio


Your customers depend on your products, you can depend on ours

- Luers, Plugs and Couplers
- Tube to Tube and Reducing Connectors
- Check Valves and Filters
- Panel Mounts
- Spikes and Ports

Have an idea? We'll work with you to bring it to life!

Injectech offers custom design and assembly services to meet your project requirements and timelines. Contact us today at **sales@chromtech.net.au**

LUERS

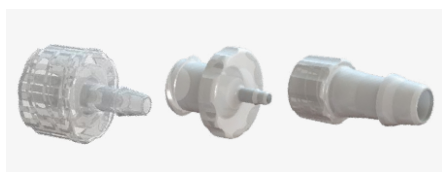


Standard | Rigid | High Flow



Bond-In



Wing Grip



Rotating



Plugs and Couplers

TUBE TO TUBE



Straight



Elbow



Tee



Y



Reducing Connectors

CHECK VALVES
FILTERS

Check Valve



Filtered Check Valve



Filter

PANEL MOUNTS



Panel Mount



Lock Nut



Color Code Ring

SPIKES



Spike to Bond-In Port



Spike to Male Slip Luer



Spike Cap

Products subject to minimum order quantities.

CONTENTS

INTRODUCTION	2-15
Product Portfolio	2
Company History	4-6
About Injectech	7
Key Markets	8
At a Glance	9
Services	10
Custom Design	11
Sample Kits	12
Why Choose Injectech?	12-13
What's New	13
Quality Standards	14
Product Change Notification Fit, Form & Function	15
LUERS	16-65
Luers ISO 80369-7	
Luers Rigid Barb	
Luers High Flow	
Male Luer Locks	
Male Luer Locks Bond-In Ports	
Female Luer Locks	
Female Luer Locks Bond-In Ports	
Female Wing Grip Luers	
Slip Luers	
Luer Plugs & Couplers	
Rotating Luers	
Rotating Luers with Snap Ring	
PANEL MOUNTS	66-67
SPIKES	68-69
CHECK VALVES / FILTERS	70-93
Check Valves	
Filtered Check Valves	
Filters	
TUBE TO TUBE	94-114
Straight Connectors	
Straight Reducing Connectors	
Elbow Connectors	
Elbow Reducing Connectors	
Tee Connectors	
Tee Reducing Connectors	
Y Connectors	
TECHNICAL INFORMATION	115-126
Chemical Resistance Chart	
Material Properties	
Conversion Charts	
Barb Dimensions	
INDEX	127-129
TERMS & CONDITIONS	130-131

LUERS

PANEL
MOUNTS

SPIKES

CHECK VALVES

TUBE TO
TUBE

Company History

Injectech, LLC was founded in 1998 as a custom molder and assembly enterprise in Fort Collins, Colorado.

In the beginning, Injectech was a “part-time” venture as we all worked for another component manufacturer during the daytime. Our primary focus was performing manual assemblies and molding.

Injectech had two machines in a rented garage unit and three very motivated owners. Our main projects were molding a line of regulator components as well as assembling a flu-vaccine introducer for the veterinary market. We did not have a cleanroom at that time. We were not ISO certified either. If we needed additional help, we would bring in contract labor/friends. We were in our infancy!



Our next steps involved creating our initial business strategy which included:

- Build a cleanroom
- Get ISO certification
- Implement a sales/marketing/promotion plan

Over the next year, we would have the cleanroom built. We became ISO certified. We also were very creative regarding our sales and marketing plan strategy.

During this time, we also welcomed our first employees. It was a very challenging financial period. At some point, each one of the owners did not take salaries for a while.

The investment in time and salary deferrals finally paid off as we closed our first “Large Customer”. We had left a sales call with only a promise that orders would come if we invested in the molds first. There was an element of risk, however, we had trust in this customer. The molds were built and the first orders came in. By this time, we had moved to our Loveland facility and had four machines operational.

The only machine large enough to run the molds had an error code one day and would not run. Panic mode! Unfortunately, the machine was an older model. The machine



manufacturer had stopped making replacement circuit boards for it. We found ourselves in a serious situation.

We looked at our financial leverage and found that the scenario was even more dire. The three of us contacted our parents for a bridge loan to cover the down payment on another machine. Luckily, the replacement machine was ready by the time the next customer shipment was due. And yes, our parents were paid back in the next two months.

We displayed at MD&M East in 2005 and closed an additional three projects with customers that are still with us today. In fact, they have become close friends. We also

met new colleagues in the medical device industry. This led us into our relationship with Elcam Medical.

In 2009, Elcam Medical acquired shares of Injectech. Injectech proceeded to build our product offering during this time. We also had an influx of international business through Elcam. We are proud to say that we now service the medical device and bioprocess industries globally. These were exciting times as the sales/marketing plan was in full force and returning the results we had expected.

In 2016, Elcam decided to focus more on their core markets and sold their shares in Injectech as part

of a strategy change. During this time, Injectech was experiencing significant growth numbers during our relationship.

Since 2003, Our core team had been managing the day-to-day operations of the company. This news had little change on the company. We simply continued what we feel Injectech does best – listening to our customers and providing quality products the medical device and bioprocess industries require.

We have learned a lot on this journey! We instill the hunger, drive, and urgency our customers expect to every employee on staff. We look forward to continued success in the future through our service mind-set.



Company History

Larry and Dave celebrate Injectech's 20th anniversary in December 2018.



What we have learned and are grateful for:


- A special "Thank You!" to each one of our employees that have believed in our vision. We appreciate all that you do!
- Injectech is saving/enhancing people's lives. We are proud of this! We have had family members that had Injectech products used in their surgeries. We are very proud of this.
- Injectech always provides open, honest communication with each of our customers. We know that manufacturing is imperfect. Things will go wrong. Dates will be missed. Many companies add us to their ASL/AVL list as they appreciate the relationships we build. We have been told that our communication and honesty are unmatched.
- Persistence in our core values and a service mindset will continue to be the building blocks for our future.
- We have invested in a management team that we are truly proud of. We will continue to invest in molds and machines to provide our unique style of service to as many customers that we can.
- We are very grateful for our customers. We are grateful for the relationships we have built. We are seriously committed to building relationships. We give thanks to our past and present customers. Thank you for believing in several guys that wanted to provide a better service. Thank you for believing in us!

Dave Splett

VP, Business Development

Larry Knipple

VP, Research and Development

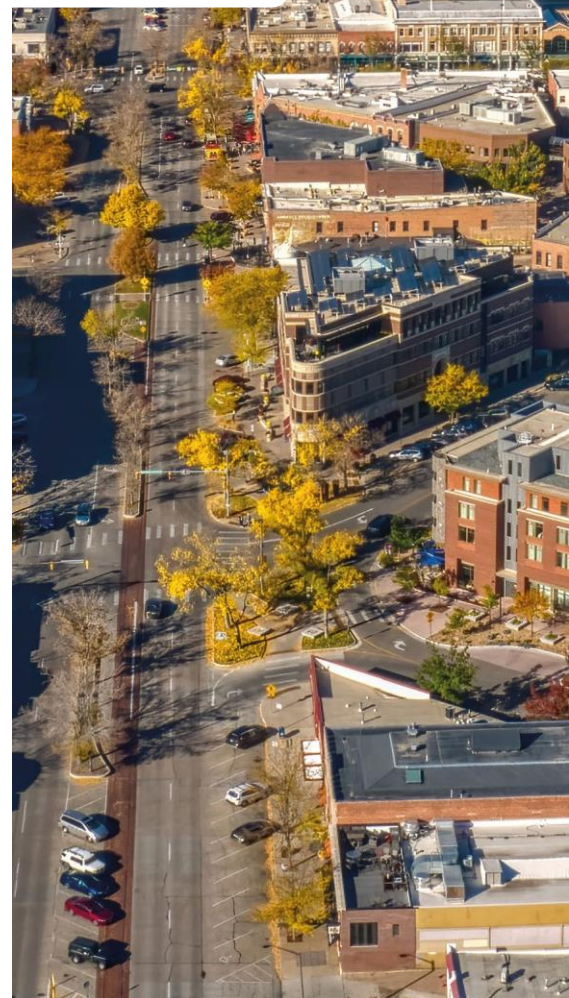


About Injectech

Injectech, LLC was founded as a custom molder and assembly enterprise. Since then we have become a trusted partner for medical device OEMs, biomedical/pharmaceutical manufacturers, veterinary suppliers, and industrial businesses worldwide.

Our Team - Injectech, LLC's management team created Injectech in 1998, after multiple years of experience working with custom molding shops and suppliers to medical OEMs.

Injectech specializes in the development and manufacture of medical, pharmaceutical, and biomedical components and assemblies. In addition to our standard line of catalog fittings, Injectech offers specialty and custom manufacturing based upon our customers' specifications.

Injectech has collaborated with many large medical device OEMs in fulfilling their engineering, design, and assembly requirements. Give us a call, they did - and they are satisfied!

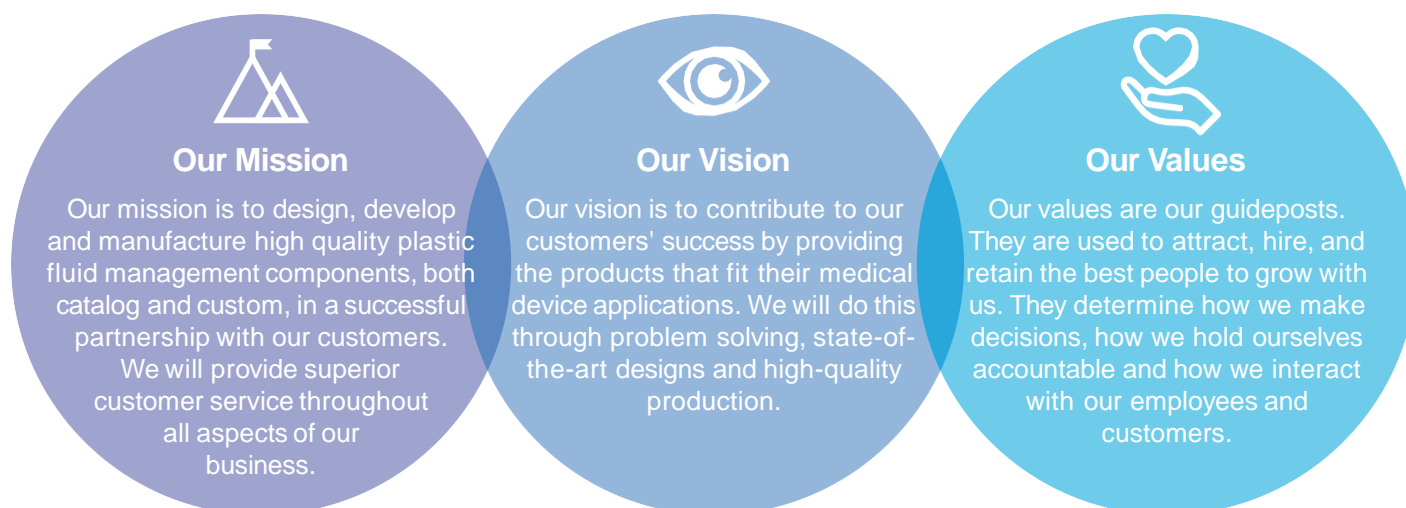

Injectech, LLC is committed to and abides by the following values:

Integrity | We strive to do the right thing always, act truthfully and honorably, and always be true to ourselves.

Quality & Service | We provide outstanding products and unsurpassed service that, together, deliver premium value to our customers.

Respect | We value our employees, encourage their development, communicate positively, and reward their performance.

Accountability | We are all personally accountable for delivering on our commitments.

Equity | We provide a supportive environment, free from discrimination, and with mutual respect and dignity.

Collaboration | We value team effort over individual effort; how we get things done is as important as what we achieve.

Continuous Improvement | We maintain a culture of ongoing assessment to improve our products and customer experience.

Citizenship | We are good citizens in the communities in which we live and work.

A Will to Succeed | We exhibit a strong will to succeed in the marketplace and every aspect of our business.

Key Markets

We are proud to serve our key markets with quality, fluid-control components in a wide range of materials and sizes.

Our plastic luer locks, tube to tube connectors, check valves, bond-in luers, spikes and more can be found on a variety of machines or tube sets within these industries.



Bioprocess

Injectech supports the bioprocess industry with an extensive range of plastic fluid control components. Our barbed luers and couplers are found in the most common upstream and downstream applications while maintaining the strict quality standards of biopharmaceutical drugs.




Cardiac

Our fittings are found in heart/lung tubing packs and a variety of catheters; cardioplegia, thrombectomy, atherectomy, ablation and intra-aortic balloon. Our components provide easy, secure and strong connections from tube to tube or machine.



Diagnostic

We serve the diagnostic market with a large selection of male/female luers, straight, tee, elbow, and Y tube to tube connectors, and threaded fittings. We offer these fittings in a variety of sizes and materials including Nylon, Kynar and animal free Polypropylene.



Nuclear

We manufacture male/female luers, spikes, and caps that aid in the connections made between the cassette manifold and tubing in PET tracer machines. Our quality plastic fittings allow for easy operation and efficiency in the production of PET tracers.




Ophthalmic

Our fluid control components are used in devices for surgeries and procedures in the ophthalmic industry such as vitrectomy and phacoemulsification. Our luers, tube to tube connectors and filters are designed to create a secure and reliable leak-tight fit.



Orthopedic

We supply the negative pressure wound therapy, cuff and surgical markets with various plastic fittings to assist with a patient's healing process. In addition to our established line of components, we also offer custom fittings which can be tailored to your project's needs.



Respiratory

Our fittings are found in ventilators, CPAP, and anesthesia machines. Standard connectors are manufactured in a variety of sizes from 1/16" to 1/4". Our reducing connectors come in multiple configurations to fit simple or unique requirements.

Injectech is committed to providing reliable plastic fittings that will contribute to the strong connections needed to keep patients safe.

At a Glance

Injectech's flexibility, short lead times and high-quality components offer a competitive advantage to our customers and partners.

From design to delivery, we are here to provide you with the high-quality fittings you need - when you need them. Injectech maintains an ISO 13485 certified quality management system. All products are molded, assembled and packaged within an ISO Class 8 cleanroom.

20+

years in business

2,500

off-the-shelf components

30,000

sq. ft

Global business of skilled professionals


We ship our components to more than 2,000 customers across 30+ countries serving 6 key markets.

30+

countries

2,000

customers

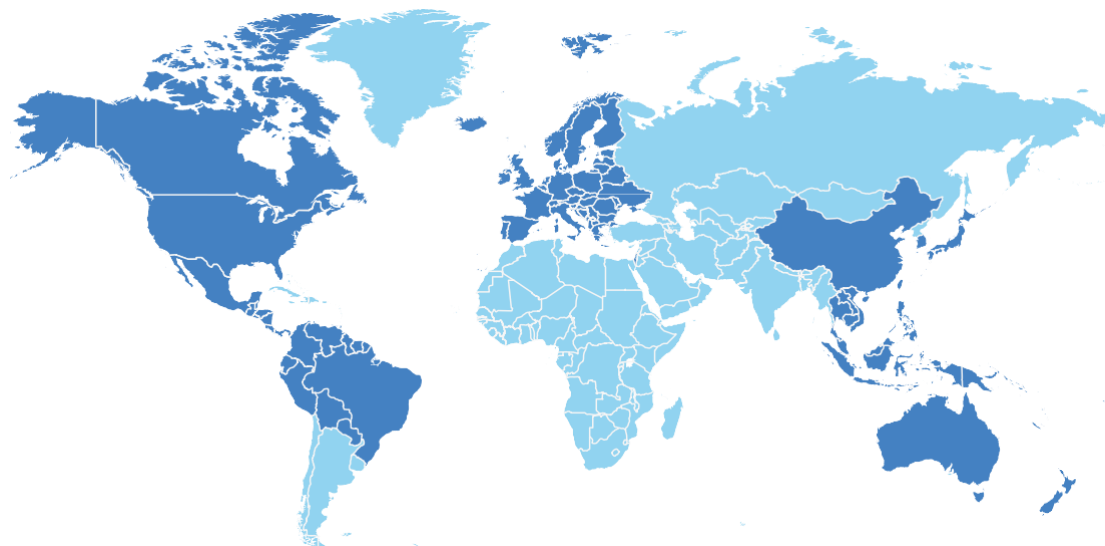

Services

Injectech has an established reputation for flexible manufacturing; to that end, we offer our customers a number of specialized services. We are equipped to manage all stages of product development from design and engineering to verification and validation.

Our plastic components are manufactured, inspected, assembled, and bagged in our Class 8 cleanroom. This same facility is where we design and ship our custom fittings. You can always trust where your components are coming from. Injectech can answer all of your questions quickly because we are with your project from start to finish.




Manufacturing

- Lot-traceable materials
- ISO Class 8 cleanroom
- ISO 13485 certified
- All electric injection presses
- Automated processes

Custom Design

- Prototype machining and molding
- Design support and consulting
- Production molds
- Material sourcing

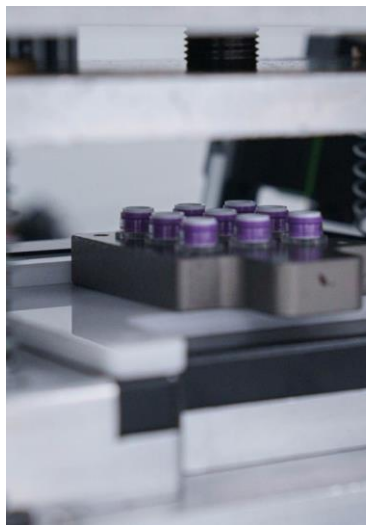

Engineering

- Custom molding
- First article inspection reports
- Thorough part qualification
- Functional and dimensional verifications

Assembly

- Solvent and adhesive bonding
- Cleanroom assembly
- Component sourcing
- Molding analysis



Custom Design

Do you have an idea for a product, but our established line of components doesn't fit your needs? Injectech offers custom design and assembly services while maintaining trustworthy customer service to meet your project requirements and timelines.

Our custom services go beyond the manufacture of custom molded components. We provide complete project management services from design to delivery. Injectech's Product Development Team will collaborate with you to help answer any questions and address any obstacles in the process to ensure the success of your project.

Have an idea?

We'll work with you to bring it to life!

- **Custom component design**
- **Cost-reduction initiatives**
- **Tool management**
- **Molding analysis**

Your customers depend on your products, you can depend on ours.



Sample Kits

Our component sample kits are available to assist customers during the component selection and flow control system specification process.

We have a range of component kits available according to their application:

- General Sample Kit
- Luers Kit
- Tube to Tube Connectors Kit

Our component sample kits provide manufacturers with a selection of components for the specification, design and testing processes. We work to support the design and production process of a variety of markets within the medical device and bioprocess industries.



Are you in need of an Injtech sample kit? Request yours today!

Why Choose Injtech?

We pride ourselves on developing successful partnerships with our customers. We offer precision design, injection molding and assembly services while focusing on quality, flexibility and superior customer service.



Focused

Committed to our customers' success. We focus on flexibility, honesty and integrity. We continue to be a reliable resource for medical device OEMs.



Trusted

We work to create trust and lasting relationships with our entire supply chain and customers. This ensures our products arrive promptly and are of superior quality.



Professional

We provide quality plastic fittings at competitive prices with trusted materials. We understand medical applications and will utilize our knowledge to serve our customers.



Understanding

We understand that our fittings are used in life-saving surgeries and medical procedures. This is a driving force in the high standard of our product offering.

What's New

Take a look below at what we've added to our fitting offering this year.



01116-PP00-004

Female Slip Luer to 1/16" Barb (1.5mm) ID Tubing

Find this fitting on page 50



01332-PP00-004

Female Slip Luer to 3/32" Barb (2.25mm) ID Tubing

Find this fitting on page 50



7C0303-RSPC01-001

80369-7 Male Slip Luer Coupler

Find this fitting on page 54



CP142-PP00-004

Female Luer Plug with Lugs

Find this fitting on page 56



T010101-PP00-004

Female Slip Luer Tee

Find this fitting on page 57



L03R18-RSPC01-001


Male Slip Luer Elbow to 1/8" Barb (3mm) ID Tubing

Find this fitting on page 60



Quality

Our company conforms to ISO 13485 requirements. We continually improve our work processes to adapt to ever evolving changes.



Customization

Not every project can utilize off-the-shelf solutions. We started our business by specializing in custom projects and welcome discussions to make unique ideas a reality.



Knowledge

Our team's extensive experience and knowledge means we can confidently guide our customers in the right direction.



Flexible

We collaborate with our customers. We understand that changes occur during a project's lifecycle so we are always prepared to find solutions that will keep a project on track.

Quality Standards

Injectech's ISO 13485 certification is an extension of our commitment to quality, our customers and our philosophy. All medical products manufactured by Injectech, LLC are molded and/or assembled in our certified Class 8 cleanroom. Our products are double bagged and labeled prior to leaving our cleanroom.

Injectech, LLC uses virgin material in our manufacturing processes. Absolutely no regrind is allowed in our system. All materials are traceable to the material manufacturer's lot identification number.

We use high quality, medical grade materials to mold all of our fittings to ensure our parts will work for your intended application without issue. We can provide

material certifications and more information by request.

We actively pursue providing you with exceptional quality products and ever-improving customer satisfaction through compliance and continual improvements. We consistently ensure that our quality management system is effective and that you receive the highest quality of service from the time you place the order to the



time you receive our products.

Injectech production is certified to meet ISO 13485 requirements and is performed in an ISO Class 8 cleanroom environment. We welcome both prototype and production runs.



The International Organization for Standardization (ISO) is in development of the new ISO 80369 standards to reduce the risk of misconnections between small-bore medical connectors.

These connectors are used in respiratory, enteral, urinary, blood pressure, neuraxial and intravenous systems which historically used an identical luer lock design. This increases the likelihood of a misconnection between the delivery systems used in the medical device industry. We have seen the impact of these new standards which has led to new designs, new parts, new molds, and the replacement

of millions of components. The FDA is reviewing the deadline for ISO 80369 enforcement.

Injectech is proud to manufacture panel mounts, barbed luers, bond-in luers, filters and check valves that meet the ISO 80369-7 standard.

Call us at Injectech and we will discuss how this could affect your project and how we can help!

Product Change Notification

As part of our commitment to customers, it is our policy to post updates on any changes that may affect a product's fit, form or function.

We make every effort to contact customers who have purchased a part within the previous year.

We also encourage you to sign up to automatically receive alerts regarding such product changes by scanning the QR code. Our Quality Department is happy to address any concerns you may have about a change.

Where possible, you will be informed if we plan to make a product obsolete. You will have the opportunity to purchase any remaining stock and we will assist in finding an alternative product. Additionally, we can send drawings or samples of alternative products for evaluation.

Please note that any changes to our custom product range are managed directly with the customer concerned.

Statement concerning “Fit, Form, and Function”


Fit: the ability of a part to physically interface with, connect to, or become an integral part of another part. Injectech defines its standard product connector line as the “fit” to a mating connector and/or tubing. Exclusions may be considered perpendicular to intended “fit”. Customer specific “fit” requirements for products/connectors may be defined by end user with the creation of a unique part number.

Form: the shape, size, dimensions, mass, weight and other visual parameters that uniquely distinguish a part. Injectech considers “form” that applies directly to the function/performance of the connector/product's intended use. Exclusions that may apply are variations in ejector pin marks that do not interfere with product's intended use. Customers may request consideration with the creation of a custom part number.

Function: the action or actions that a part is designed to perform. Injectech products are initially designed to allow the transfer of media through the product or securing the product supporting media transfer. There are no exclusions from this definition as customers are required to test Injectech products in their specific applications.



Example: If a customer requires the part diameter to be controlled because the end use requires the fitting to snap into a housing. This would require a new assigned part number.

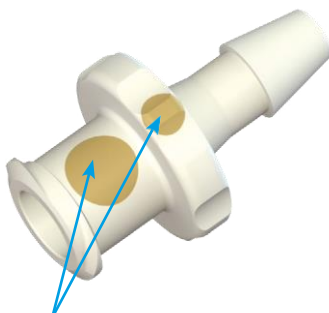

Ejector Pin Marks



Notes: any additional requirements specifying new part number assignments may be subject to a NRE (non-reoccurring engineering fee) and/or a minimum order requirement.

Please contact our sales department with any questions at sales@chromtech.net.au



Luers

Injectech luer designs are tested for compliance to relevant international standards ISO 594-1, 594-2 and 80369-7 to ensure compatibility and a leak-tight fit.

Lot-traceable

- Manufactured with 100% virgin materials. Material and product certifications are available on request
- Manufactured and packaged in an ISO Class 8 cleanroom environment
- Manufactured to ISO 13485 quality system standards


Single Barb Design

- **No mold parting line on the sealing surface minimizing potential leaks**
- **Single barbs allow for maximum relaxation of the tubing behind the barb resulting in a remarkable non-slip grip**
- **Geometry of the barb is designed for easy assembly without compromising the fitting's strength or pressure capability**

ISO 80369-7 Design

The ISO 80369 series of standards aims to minimize misconnections between small bore connectors of different functional categories. ISO 80369-7 specifically addresses intravascular and hypodermic applications.

Injectech has conducted extensive research to determine the best manufacturing methods and proper protocol to evaluate and meet compliance to the ISO 80369-7 standard.



All fittings in this section are compliant to the ISO 80369-7 standard.

ISO 80369-7 Compliant | Male Luer Locks

Component	Cross Section	Part Number	Description
		704116	80369-7 Male Luer Lock to 1/16" Barb (1.5mm) ID Tubing
		704116-N01-006	White Nylon
		704116-PP00-004	Animal Free Polypropylene
		704116-ABS00-003	Clear ABS
		704116-PC01-000	Clear Polycarbonate
		704332	80369-7 Male Luer Lock to 3/32" Barb (2.25mm) ID Tubing
		704332-N01-006	White Nylon
		704332-PP00-004	Animal Free Polypropylene
		704332-ABS00-003	Clear ABS
		704332-PC01-000	Clear Polycarbonate
		70418	80369-7 Male Luer Lock to 1/8" Barb (3mm) ID Tubing
		70418-N01-006	White Nylon
		70418-PP00-004	Animal Free Polypropylene
		70418-ABS00-003	Clear ABS
		70418-PC01-000	Clear Polycarbonate

LUERS









Barb Design

Technical information regarding barb dimensions can be found on p126 at the back of this catalog.



All fittings in this section are compliant to the ISO 80369-7 standard.


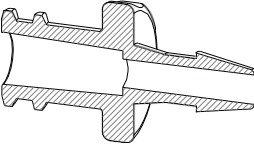
ISO 80369-7 Compliant | Male Luer Locks

Component	Cross Section	Part Number	Description
		704532	80369-7 Male Luer Lock to 5/32" Barb (4mm) ID Tubing
		704532-N01-006	White Nylon
		704532-PP00-004	Animal Free Polypropylene
		704532-ABS00-003	Clear ABS
		704316	80369-7 Male Luer Lock to 3/16" Barb (4.75mm) ID Tubing
		704316-N01-006	White Nylon
		704316-PP00-004	Animal Free Polypropylene
		704316-ABS00-003	Clear ABS
		70414	80369-7 Male Luer Lock to 1/4" Barb (6.25mm) ID Tubing
		70414-N01-006	White Nylon
		70414-PP00-004	Animal Free Polypropylene
		70414-ABS00-003	Clear ABS
		70414-PC01-000	Clear Polycarbonate



All fittings in this section are compliant to the ISO 80369-7 standard.

ISO 80369-7 Compliant | Female Luer Locks

Component	Cross Section	Part Number	Description
		702116	80369-7 Female Luer Lock to 1/16" Barb (1.5mm) ID Tubing
		702116NP-N01-006	White Nylon
		702116NP-PP00-004	Animal Free Polypropylene
		702116-ABS00-003	Clear ABS
		702116-PC01-000	Clear Polycarbonate
		702332	80369-7 Female Luer Lock to 3/32" Barb (2.25mm) ID Tubing
		702332NP-N01-006	White Nylon
		702332NP-PP00-004	Animal Free Polypropylene
		702332-ABS00-003	Clear ABS
		702332-PC01-000	Clear Polycarbonate
		70218	80369-7 Female Luer Lock to 1/8" Barb (3mm) ID Tubing
		70218NP-N01-006	White Nylon
		70218NP-PP00-004	Animal Free Polypropylene
		70218-ABS00-003	Clear ABS
		70218-PC01-000	Clear Polycarbonate

ISO Standards







Information regarding the ISO 80369 standards can be found on p14.



All fittings in this section are compliant to the ISO 80369-7 standard.

ISO 80369-7 Compliant | Female Luer Locks

LUERS

Component	Cross Section	Part Number	Description
		702532 702532NP-N01-006 702532NP-PP00-004 702532-ABS00-003 702532-PC01-000	80369-7 Female Luer Lock to 5/32" Barb (4mm) ID Tubing White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate
		702316 702316NP-N01-006 702316NP-PP00-004 702316-ABS00-003 702316-PC01-000	80369-7 Female Luer Lock to 3/16" Barb (4.75mm) ID Tubing White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate
		70214 70214NP-N01-006 70214NP-PP00-004 70214-ABS00-003 70214-PC01-000	80369-7 Female Luer Lock to 1/4" Barb (6.25mm) ID Tubing White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate




All fittings in this section are compliant to the ISO 80369-7 standard.

ISO 80369-7 Compliant | Male Bond-In Ports

Component	Cross Section	Part Number	Description
-----------	---------------	-------------	-------------

LUERS




04B095

Male Luer Lock Bond-in Port
.100/.090 (2.54mm/2.28mm)

04B095-ACRL00-004

Clear Acrylic




04B110

Male Luer Lock Bond-in Port
.115/.105 (2.92mm/2.66mm)

04B110-ACRL00-004

Clear Acrylic



04B130

Male Luer Lock Bond-in Port
.134/.123 (3.4mm/3.12mm)


04B130-ACRL00-004

Clear Acrylic


Bond-In Ports

Our bond-in luers allow tubing to be assembled to either the inside or the outside of the fitting. Examples below:

Bond-In Port 04B095

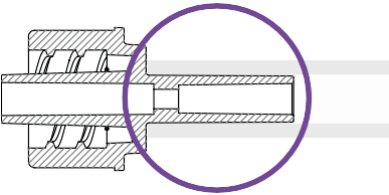





Bond-In Port 04B312

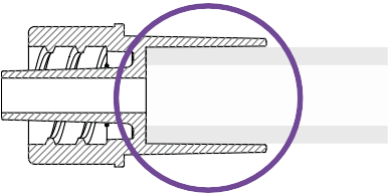

All fittings in this section are compliant to the ISO 80369-7 standard.

ISO 80369-7 Compliant | Male Bond-In Ports

LUERS

Component	Cross Section	Part Number	Description
		04B187 04B187-ACRL00-004	Male Luer Lock Bond-in Port .192/.182 (4.87mm/4.62mm) Clear Acrylic
		04B312 04B312-ACRL00-004	Male Luer Lock Bond-in Port .310/.320 (7.87mm/8.13mm) Clear Acrylic







Don't see what you're looking for?
We can also provide





All fittings in this section are compliant to the ISO 80369-7 standard.




ISO 80369-7 Compliant | Female Bond-In Ports

Component	Cross Section	Part Number	Description
		02B062	Female Luer Lock Bond-in Port .065/.056 (1.65mm/1.42mm)
		02B062-ACRL00-004 02B062-COPE00-000	Clear Acrylic Clear Copolyester
		02B085	Female Luer Lock Bond-in Port .088/.079 (2.23mm/2mm)
		02B085-ACRL00-004 02B085-COPE00-000	Clear Acrylic Clear Copolyester
		02B104	Female Luer Lock Bond-in Port .114/.100 (2.89mm/2.54mm)
		02B104-ACRL00-004 02B104-COPE00-000	Clear Acrylic Clear Copolyester



All fittings in this section are compliant to the ISO 80369-7 standard.


ISO 80369-7 Compliant | Female Bond-In Ports

Component	Cross Section	Part Number	Description
		02B130	Female Luer Lock Bond-in Port .134/.124 (3.4mm/3.14mm)
		02B130-ACRL00-004 02B130-COPE00-000	Clear Acrylic Clear Copolyester
		02B156	Female Luer Lock Bond-in Port .163/.134 (4.14mm/3.4mm)
		02B156-ACRL00-004 02B156-COPE00-000	Clear Acrylic Clear Copolyester
		02B187	Female Luer Lock Bond-in Port .192/.183 (4.87mm/4.64mm)
		02B187-ACRL00-004 02B187-COPE00-000	Clear Acrylic Clear Copolyester

Rigid Barb Design


The rigid barb design offers a smaller barb outside diameter. This results in easier tube assembly when working with rigid tubing. Barb comparisons below:

Standard Barb

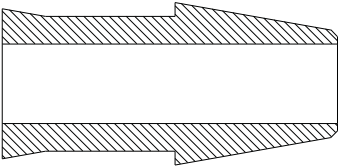

OD for 1/8" standard barb is 0.188"

Rigid Barb

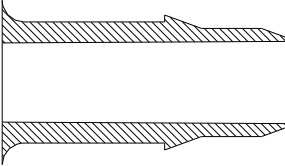

OD for 1/8" rigid barb is 0.156"

Rigid Barb | Male Luer Locks



Component	Cross Section	Part Number	Description
		04R116	Male Luer Lock to 1/16" Rigid Barb (1.5mm) ID Tubing
		04R116-N01-006	White Nylon
		04R116-PP00-004	Animal Free Polypropylene
		04R116-PC01-000	Clear Polycarbonate
		04R116-RSPC01-005	Radiation Stable Polycarbonate
		04R116-KY01-000	Kynar
		04R332	Male Luer Lock to 3/32" Rigid Barb (2.25mm) ID Tubing
		04R332-N01-006	White Nylon
		04R332-PP00-004	Animal Free Polypropylene
		04R316	Male Luer Lock to 3/16" Rigid Barb (4.75mm) ID Tubing
		04R316-N01-006	White Nylon
		04R316-PP00-004	Animal Free Polypropylene
		04R316-PC01-000	Clear Polycarbonate
		04R316-RSPC01-005	Radiation Stable Polycarbonate
		04R316-KY01-000	Kynar

LUERS


Rigid Barb Design

Our rigid barbs are intended for use with higher durometer tubing such as polyethylene.

Rigid Barb | Female Luer Locks

Component	Cross Section	Part Number	Description
		02R116 02R116-N01-006 02R116-PP00-004 02R116-PC01-000 02R116-RSPC01-005 02R116-KY01-000	Female Luer Lock to 1/16" Rigid Barb (1.5mm) ID Tubing White Nylon Animal Free Polypropylene Clear Polycarbonate Radiation Stable Polycarbonate Kynar

Injectech's ISO 13485 certification is an extension of our commitment to quality, our customers and our philosophy.

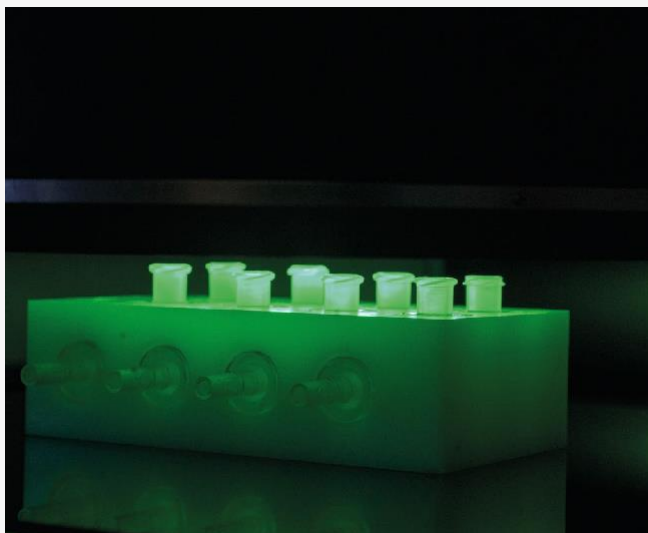

All medical products manufactured by Injectech, LLC are molded, inspected and/or assembled in our certified Class 8 cleanroom. Our products are double-bagged and labeled prior to leaving our cleanroom.

High Flow Barb Design

The high flow barb design incorporates two important features:

- A smaller barb outside diameter for easier insertion into tubing
- A larger through hole to allow increased flow and vacuum rates







Male luers with barb sizes 1/8" (3mm) and below are limited in flow rate by the core pin that makes the internal feature of the barb. Our 5/32" (4mm) up to 1/4" (6.25mm)

barb sizes incorporate a larger luer through hole. This is designated by a "CP" in the part number to indicate a larger total through hole diameter when compared to our other male luer products.


Part number designations

- HF designates our high flow barb design
- CP designates a larger luer core pin

High Flow Luers


Component	Cross Section	Part Number	Description
		04HF18	Male Luer Lock to 1/8" High Flow Barb (3mm) ID Tubing
		04HF18-N01-006	White Nylon
		04HF18-PP00-004	Animal Free Polypropylene
		04HF18-PC01-000	Clear Polycarbonate
		04HF18-RSPC01-005	Radiation Stable Polycarbonate
		04HF18-KY01-000	Kynar
		04HF532CP	Male Luer Lock to 5/32" High Flow Barb (4mm) ID Tubing
		04HF532CP-N01-006	White Nylon
		04HF532CP-PP00-004	Animal Free Polypropylene
		04HF532CP-PC01-000	Clear Polycarbonate
		04HF532CP-RSPC01-005	Radiation Stable Polycarbonate
		04HF532CP-KY01-000	Kynar
		04HF316CP	Male Luer Lock to 3/16" High Flow Barb (4.75mm) ID Tubing
		04HF316CP-N01-006	White Nylon
		04HF316CP-PP00-004	Animal Free Polypropylene
		04HF316CP-PC01-000	Clear Polycarbonate
		04HF316CP-RSPC01-005	Radiation Stable Polycarbonate
		04HF316CP-KY01-000	Kynar

5/32" Standard Barb

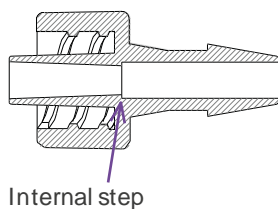

VS.





5/32" High Flow Barb

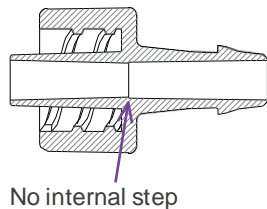

High Flow Luers

Component	Cross Section	Part Number	Description
		04HF14CP	Male Luer Lock to 1/4" High Flow Barb (6.25mm) ID Tubing
		04HF14CP-N01-006	White Nylon
		04HF14CP-PP00-004	Animal Free Polypropylene
		04HF14CP-PC01-000	Clear Polycarbonate
		04HF14CP-RSPC01-005	Radiation Stable Polycarbonate
		02HF18	Female Luer Lock to 1/8" High Flow Barb (3mm) ID Tubing
		02HF18-N01-006	White Nylon
		02HF18-PP00-004	Animal Free Polypropylene
		02HF18-PC01-000	Clear Polycarbonate
		02HF18-RSPC01-005	Radiation Stable Polycarbonate
		02HF532	Female Luer Lock to 5/32" High Flow Barb (4mm) ID Tubing
		02HF532-N01-006	White Nylon
		02HF532-PP00-004	Animal Free Polypropylene
		02HF532-PC01-000	Clear Polycarbonate
		02HF532-RSPC01-005	Radiation Stable Polycarbonate
		02HF532	Female Luer Lock to 5/32" High Flow Barb (4mm) ID Tubing
		02HF532-N01-006	White Nylon
		02HF532-PP00-004	Animal Free Polypropylene
		02HF532-PC01-000	Clear Polycarbonate
		02HF532-RSPC01-005	Radiation Stable Polycarbonate
		02HF532	Female Luer Lock to 5/32" High Flow Barb (4mm) ID Tubing
		02HF532-N01-006	White Nylon
		02HF532-PP00-004	Animal Free Polypropylene
		02HF532-PC01-000	Clear Polycarbonate
		02HF532-RSPC01-005	Radiation Stable Polycarbonate
		02HF532	Female Luer Lock to 5/32" High Flow Barb (4mm) ID Tubing
		02HF532-N01-006	White Nylon
		02HF532-PP00-004	Animal Free Polypropylene
		02HF532-PC01-000	Clear Polycarbonate
		02HF532-RSPC01-005	Radiation Stable Polycarbonate

High Flow Luers

Component	Cross Section	Part Number	Description
		02HF316	Female Luer Lock to 3/16" High Flow Barb (4.75mm) ID Tubing
		02HF316-N01-006	White Nylon
		02HF316-PP00-004	Animal Free Polypropylene
		02HF316-PC01-000	Clear Polycarbonate
		02HF316-RSPC01-005	Radiation Stable Polycarbonate
		02HF316-KY01-000	Kynar
		02HF14	Female Luer Lock to 1/4" High Flow Barb (6.25mm) ID Tubing
		02HF14-N01-006	White Nylon
		02HF14-PP00-004	Animal Free Polypropylene
		02HF14-PC01-000	Clear Polycarbonate
		02HF14-RSPC01-005	Radiation Stable Polycarbonate
		02HF14-KY01-000	Kynar

When quality counts, you can trust the reliable products Injectech supplies.





Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene



KY01-000 | Kynar

ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.

Male Luer Locks



Component		Cross Section	Part Number	Description
			04116	Male Luer Lock to 1/16" Barb (1.5mm) ID Tubing
			04116-N01-006 04116-PP00-004 04116-ABS00-002 04116-PC01-000 04116-RSPC01-005 04116-KY01-000	White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate Radiation Stable Polycarbonate Kynar
			04R116	Male Luer Lock to 1/16" Rigid Barb (1.5mm) ID Tubing
			04R116-N01-006 04R116-PP00-004 04R116-PC01-000 04R116-RSPC01-005 04R116-KY01-000	White Nylon Animal Free Polypropylene Clear Polycarbonate Radiation Stable Polycarbonate Kynar
			704116	80369-7 Male Luer Lock to 1/16" Barb (1.5mm) ID Tubing
			704116-N01-006 704116-PP00-004 704116-ABS00-003 704116-PC01-000	White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate





This icon designates a fitting is compliant to the ISO 80369-7 standard.

Male Luer Locks

Component	Cross Section	Part Number	Description
		04332 04332-N01-006 04332-PP00-004 04332-ABS00-002 04332-PC01-000 04332-RSPC01-005 04332-KY01-000	Male Luer Lock to 3/32" Barb (2.25mm) ID Tubing White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate Radiation Stable Polycarbonate Kynar
		704332 704332-N01-006 704332-PP00-004 704332-ABS00-003 704332-PC01-000	80369-7 Male Luer Lock to 3/32" Barb (2.25mm) ID Tubing White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate
		04R332 04R332-N01-006 04R332-PP00-004	Male Luer Lock to 3/32" Rigid Barb (2.25mm) ID Tubing White Nylon Animal Free Polypropylene





Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene



KY01-000 | Kynar

ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.

Male Luer Locks







LUERS	Component	Cross Section	Part Number	Description
			0418	Male Luer Lock to 1/8" Barb (3mm) ID Tubing
			0418-N01-006 0418-PP00-004 0418-ABS00-002 0418-PC01-000 0418-RSPC01-005 0418-KY01-000	White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate Radiation Stable Polycarbonate Kynar
			04HF18	Male Luer Lock to 1/8" High Flow Barb (3mm) ID Tubing
			04HF18-N01-006 04HF18-PP00-004 04HF18-PC01-000 04HF18-RSPC01-005 04HF18-KY01-000	White Nylon Animal Free Polypropylene Clear Polycarbonate Radiation Stable Polycarbonate Kynar
			70418	80369-7 Male Luer Lock to 1/8" Barb (3mm) ID Tubing
			70418-N01-006 70418-PP00-004 70418-ABS00-003 70418-PC01-000	White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate





This icon designates a fitting is compliant to the ISO 80369-7 standard.

Male Luer Locks







Component	Cross Section	Part Number	Description
		04532 04532-N01-006 04532-PP00-004 04532-ABS00-002 04532-PC01-000 04532-RSPC01-005 04532-KY01-000	Male Luer Lock to 5/32" Barb (4mm) ID Tubing White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate Radiation Stable Polycarbonate Kynar
		04HF532CP 04HF532CP-N01-006 04HF532CP-PP00-004 04HF532CP-PC01-000 04HF532CP-RSPC01-005 04HF532CP-KY01-000	Male Luer Lock to 5/32" High Flow Barb (4mm) ID Tubing White Nylon Animal Free Polypropylene Clear Polycarbonate Radiation Stable Polycarbonate Kynar
		704532 704532-N01-006 704532-PP00-004 704532-ABS00-003 704532-PC01-000	80369-7 Male Luer Lock to 5/32" Barb (4mm) ID Tubing White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate



Barb Design

Technical information regarding barb dimensions can be found on p126 at the back of this catalog.







Male Luer Locks

LUERS	Component	Cross Section	Part Number	Description
			04316	Male Luer Lock to 3/16" Barb (4.75mm) ID Tubing
			04316-N01-006 04316-PP00-004 04316-ABS00-002 04316-PC01-000 04316-RSPC01-005 04316-KY01-000	White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate Radiation Stable Polycarbonate Kynar
			04HF316CP	Male Luer Lock to 3/16" High Flow Barb (4.75mm) ID Tubing
			04HF316CP-N01-006 04HF316CP-PP00-004 04HF316CP-PC01-000 04HF316CP-RSPC01-005 04HF316CP-KY01-000	White Nylon Animal Free Polypropylene Clear Polycarbonate Radiation Stable Polycarbonate Kynar
			04R316	Male Luer Lock to 3/16" Rigid Barb (4.75mm) ID Tubing
			04R316-N01-006 04R316-PP00-004 04R316-PC01-000 04R316-RSPC01-005 04R316-KY01-000	White Nylon Animal Free Polypropylene Clear Polycarbonate Radiation Stable Polycarbonate Kynar



This icon designates a fitting is compliant to the ISO 80369-7 standard.

Male Luer Locks

Component	Cross Section	Part Number	Description
		704316	80369-7 Male Luer Lock to 3/16" Barb (4.75mm) ID Tubing
		704316-N01-006 704316-PP00-004 704316-ABS00-003 704316-PC01-000	White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate
		0414	Male Luer Lock to 1/4" Barb (6.25mm) ID Tubing
		0414-N01-006 0414-PP00-004 0414-ABS00-002 0414-PC01-000 0414-RSPC01-005 0414-KY01-000	White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate Radiation Stable Polycarbonate Kynar
		04HF14CP	Male Luer Lock to 1/4" High Flow Barb (6.25mm) ID Tubing
		04HF14CP-N01-006 04HF14CP-PP00-004 04HF14CP-PC01-000 04HF14CP-RSPC01-005 04HF14CP-KY01-000	White Nylon Animal Free Polypropylene Clear Polycarbonate Radiation Stable Polycarbonate Kynar



Animal Derivative Free Materials:


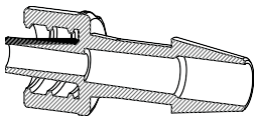
PP00-004 | Animal Free Polypropylene
KY01-000 | Kynar
ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.

Male Luer Locks

LUERS

Component	Cross Section	Part Number	Description
 		70414	80369-7 Male Luer Lock to 1/4" Barb (6.25mm) ID Tubing
		70414-N01-006	White Nylon
		70414-PP00-004	Animal Free Polypropylene
		70414-ABS00-003	Clear ABS
		70414-PC01-000	Clear Polycarbonate



Sample Kits are Available

Our sample kits include a variety of both male and female luer sizes as well as tube to tube connectors, spikes, plugs, and couplers. The fittings also come in many differing materials; polypropylene, polycarbonate, nylon, radiation stable polycarbonate, and more!

These kits are an invaluable development tool to assist with small quantity testing without having to purchase a multitude of different samples. At Injectech, we want to make the design process as simple as possible for your team and you.



KIT-001







Fluid Component Connectors
Luers | Check Valves | Tube to Tube

Are you in need of an Injectech sample kit? Request yours today!



This icon designates a fitting is compliant to the ISO 80369-7 standard.

Male Luer Locks | Bond-in Ports


Component	Cross Section	Part Number	Description
		04B095 04B095-ACRL00-004	Male Luer Lock Bond-in Port .100/.090 (2.54mm/2.28mm) Clear Acrylic
		04B110 04B110-ACRL00-004	Male Luer Lock Bond-in Port .115/.105 (2.92mm/2.66mm) Clear Acrylic
		04B130 04B130-ACRL00-004	Male Luer Lock Bond-in Port .134/.123 (3.4mm/3.12mm) Clear Acrylic

LUERS


Bond-In Ports

Our bond-in luers allow tubing to be assembled to either the inside or the outside of the fitting. Examples below:





Bond-In Port 04B095

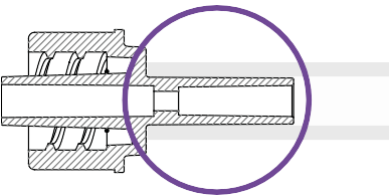

Bond-In Port 04B312

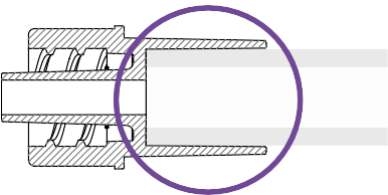

Male Luer Locks | Bond-in Ports

Component		Cross Section	Part Number	Description
			04B187	Male Luer Lock Bond-in Port .192/.182 (4.87mm/4.62mm)
			04B187-ACRL00-004	Clear Acrylic
			04B312	Male Luer Lock Bond-in Port .310/.320 (7.87mm/8.13mm)
			04B312-ACRL00-004	Clear Acrylic



When quality counts, you can trust the reliable products Injectech supplies.





This icon designates a fitting is compliant to the ISO 80369-7 standard.

Female Luer Locks

Component	Cross Section	Part Number	Description
		02116	Female Luer Lock to 1/16" Barb (1.5mm) ID Tubing
		02116-N01-006	White Nylon
		02116-PP00-004	Animal Free Polypropylene
		02116-ABS00-002	Clear ABS
		02116-PC01-000	Clear Polycarbonate
		02116-RSPC01-005	Radiation Stable Polycarbonate
		02116-KY01-000	Kynar
		02R116	Female Luer Lock to 1/16" Rigid Barb (1.5mm) ID Tubing
		02R116-N01-006	White Nylon
		02R116-PP00-004	Animal Free Polypropylene
		02R116-PC01-000	Clear Polycarbonate
		02R116-RSPC01-005	Radiation Stable Polycarbonate
		02R116-KY01-000	Kynar
		702116	80369-7 Female Luer Lock to 1/16" Barb (1.5mm) ID Tubing
		702116NP-N01-006	White Nylon
		702116NP-PP00-004	Animal Free Polypropylene
		702116-ABS00-003	Clear ABS
		702116-PC01-000	Clear Polycarbonate





Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene
KY01-000 | Kynar
ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.

Female Luer Locks






Component	Cross Section	Part Number	Description
		02332 02332-N01-006 02332-PP00-004 02332-ABS00-002 02332-PC01-000 02332-RSPC01-005 02332-KY01-000	Female Luer Lock to 3/32" Barb (1.5mm) ID Tubing White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate Radiation Stable Polycarbonate Kynar
		02HF332SB 02HF332SB-N01-006	Female Luer Lock to 3/32" Barb (2.25mm) Smooth Bore White Nylon
		702332 702332NP-N01-006 702332NP-PP00-004 702332-ABS00-003 702332-PC01-000	80369-7 Female Luer Lock to 3/32" Barb (2.25mm) ID Tubing White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate






This icon designates a fitting is compliant to the ISO 80369-7 standard.

Female Luer Locks







Component	Cross Section	Part Number	Description
		0218	Female Luer Lock to 1/8" Barb (3mm) ID Tubing
		0218-N01-006 0218-PP00-004 0218-ABS00-002 0218-PC01-000 0218-RSPC01-005 0218-KY01-000	White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate Radiation Stable Polycarbonate Kynar
		02HF18	Female Luer Lock to 1/8" High Flow Barb (3mm) ID Tubing
		02HF18-N01-006 02HF18-PP00-004 02HF18-PC01-000 02HF18-RSPC01-005 02HF18-KY01-000	White Nylon Animal Free Polypropylene Clear Polycarbonate Radiation Stable Polycarbonate Kynar
		70218	80369-7 Female Luer Lock to 1/8" Barb (3mm) ID Tubing
		70218-N01-006 70218-PP00-004 70218-ABS00-003 70218-PC01-000	White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate





Custom options are available.
Contact sales@injectech.us
for more information.




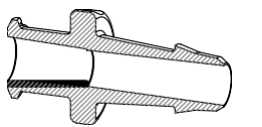
Female Luer Locks

LUERS	Component	Cross Section	Part Number	Description
			CP033 CP033-ABS05-000	Female Luer Lock to 1/8" Rigid Barb (3mm) ID Tubing Blue ABS
			02532 02532-N01-006 02532-PP00-004 02532-ABS00-002 02532-PC01-000 02532-RSPC01-005 02532-KY01-000	Female Luer Lock to 5/32" Barb (4mm) ID Tubing White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate Radiation Stable Polycarbonate Kynar
			02HF532 02HF532-N01-006 02HF532-PP00-004 02HF532-PC01-000 02HF532-RSPC01-005 02HF532-KY01-000	Female Luer Lock to 5/32" High Flow Barb (4mm) ID Tubing White Nylon Animal Free Polypropylene Clear Polycarbonate Radiation Stable Polycarbonate Kynar



This icon designates a fitting is compliant to the ISO 80369-7 standard.

Female Luer Locks

Component	Cross Section	Part Number	Description
		702532	80369-7 Female Luer Lock to 5/32" Barb (4mm) ID Tubing
		702532NP-N01-006	White Nylon
		702532NP-PP00-004	Animal Free Polypropylene
		702532-ABS00-003	Clear ABS
		702532-PC01-000	Clear Polycarbonate
		02316	Female Luer Lock to 3/16" Barb (4.75mm) ID Tubing
		02316-N01-006	White Nylon
		02316-PP00-004	Animal Free Polypropylene
		02316-ABS00-002	Clear ABS
		02316-PC01-000	Clear Polycarbonate
		02316-RSPC01-005	Radiation Stable Polycarbonate
		02316-KY01-000	Kynar
		02HF316	Female Luer Lock to 3/16" High Flow Barb (4.75mm) ID Tubing
		02HF316-N01-006	White Nylon
		02HF316-PP00-004	Animal Free Polypropylene
		02HF316-PC01-000	Clear Polycarbonate
		02HF316-RSPC01-005	Radiation Stable Polycarbonate
		02HF316-KY01-000	Kynar





Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene







KY01-000 | Kynar

ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.

Female Luer Locks


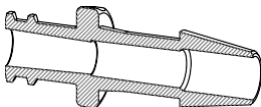
Component	Cross Section	Part Number	Description
		702316	80369-7 Female Luer Lock to 3/16" Barb (4.75mm) ID Tubing
		702316NP-N01-006 702316NP-PP00-004 702316-ABS00-003 702316-PC01-000	White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate
		0214	Female Luer Lock to 1/4" Barb (6.25mm) ID Tubing
		0214-N01-006 0214-PP00-004 0214-ABS00-002 0214-PC01-000 0214-RSPC01-005 0214-KY01-000	White Nylon Animal Free Polypropylene Clear ABS Clear Polycarbonate Radiation Stable Polycarbonate Kynar
		02HF14	Female Luer Lock to 1/4" High Flow Barb (6.25mm) ID Tubing
		02HF14-N01-006 02HF14-PP00-004 02HF14-PC01-000 02HF14-RSPC01-005 02HF14-KY01-000	White Nylon Animal Free Polypropylene Clear Polycarbonate Radiation Stable Polycarbonate Kynar





This icon designates a fitting is compliant to the ISO 80369-7 standard.

Female Luer Locks

Component	Cross Section	Part Number	Description
 		70214	80369-7 Female Luer Lock to 1/4" Barb (6.25mm) ID Tubing
		70214NP-N01-006	White Nylon
		70214NP-PP00-004	Animal Free Polypropylene
		70214-ABS00-003	Clear ABS
		70214-PC01-000	Clear Polycarbonate





Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene





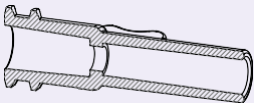
KY01-000 | Kynar

ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.


Female Luer Locks | Bond-in Ports

Component	Cross Section	Part Number	Description
		02B062 02B062-ACRL00-004 02B062-COPE00-000	Female Luer Lock Bond-in Port .065/.056 (1.65mm/1.42mm) Clear Acrylic Clear Copolyester
		02B085 02B085-ACRL00-004 02B085-COPE00-000	Female Luer Lock Bond-in Port .088/.079 (2.23mm/2mm) Clear Acrylic Clear Copolyester
		02B104 02B104-ACRL00-004 02B104-COPE00-000	Female Luer Lock Bond-in Port .114/.100 (2.89mm/2.54mm) Clear Acrylic Clear Copolyester

ISO 80369-7 Design

Injectech has conducted extensive research to determine the best manufacturing methods and proper protocol to evaluate and meet compliance to the ISO 80369-7 standard.


Our female bond-in luers meet the requirements for the ISO 80369-7 standard.

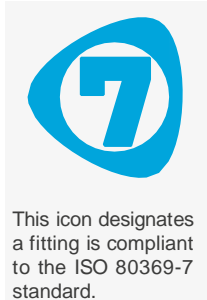

Female Luer Locks | Bond-in Ports

Component	Cross Section	Part Number	Description
		02B130 02B130-ACRL00-004 02B130-COPE00-000	Female Luer Lock Bond-in Port .134/.124 (3.4mm/3.14mm) Clear Acrylic Clear Copolyester
		02B156 02B156-ACRL00-004 02B156-COPE00-000	Female Luer Lock Bond-in Port .163/.134 (4.14mm/3.4mm) Clear Acrylic Clear Copolyester
		02B187 02B187-ACRL00-004 02B187-COPE00-000	Female Luer Lock Bond-in Port .192/.183 (4.87mm/4.64mm) Clear Acrylic Clear Copolyester

LUERS

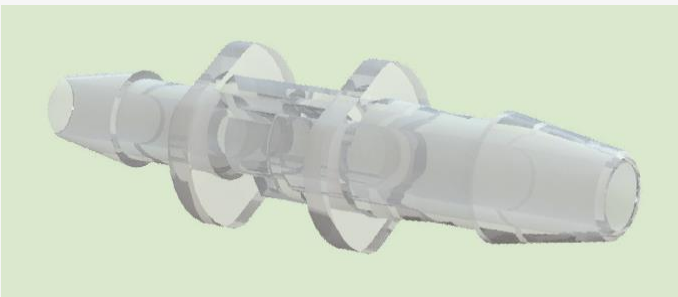

In need of a material that holds up against oncology drug carrier solvents such as Dimethylsulfoxide (DMSO)?

Eastman Tritan™ copolyester, manufactured by Eastman, outperformed polycarbonate when testing the impact resistance of materials against DMSO.

Products we offer in Tritan™ copolyester:

- Female bond-ins
- Tube to tube connectors
- Reducing tube to tube connectors

Materials	Dimethylsulfoxide (DMSO) % Retention of impact energy to break
Tritan™ MX731	60 ± 7
Polycarbonate	All broke on jig
Lipid Resistant Polycarbonate	All broke on jig




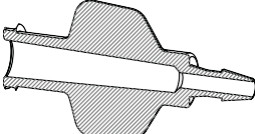

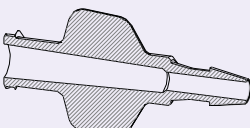
*Source - Eastman Chemical Company | Results were achieved through Eastman's well developed Four-Step Test for testing how polymers will perform when frequently exposed to drugs and disinfectants. For a full explanation of these results and the testing protocol, please contact us.

Wing Grip Luers allow easy connections - even when wearing gloves.

Wing features offer a flat, comfortable, non-slip gripping surface that provides the extra leverage needed to ensure a secure connection.



Female Wing Grip Luers

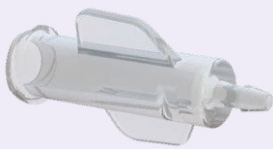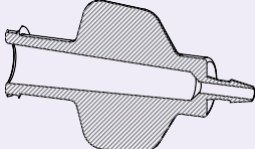Component	Cross Section	Part Number	Description
		02G116 02G116-PP00-004 02G116-ABS00-002 02G116-PC01-000	Female Wing Grip Luer to 1/16" Barb (1.5mm) ID Tubing Animal Free Polypropylene Clear ABS Clear Polycarbonate
		02G332 02G332-PP00-004 02G332-ABS00-002 02G332-PC01-000	Female Wing Grip Luer to 3/32" Barb (2.25mm) ID Tubing Animal Free Polypropylene Clear ABS Clear Polycarbonate
		02G18 02G18-PP00-004 02G18-ABS00-002 02G18-PC01-000	Female Wing Grip Luer to 1/8" Barb (3mm) ID Tubing Animal Free Polypropylene Clear ABS Clear Polycarbonate



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene







KY01-000 | Kynar

ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.

Slip Luers

Component	Cross Section	Part Number	Description
		01116	Female Slip Luer to 1/16" Barb (1.5mm) ID Tubing
		01116-PP00-004 01116-ABS00-002 01116-RSPC01-001	Animal Free Polypropylene Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		01332	Female Slip Luer to 3/32" Barb (2.25mm) ID Tubing
		01332-PP00-004 01332-ABS00-002 01332-RSPC01-001	Animal Free Polypropylene Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		S01332	Female Slip Luer to 3/32" Barb (2.25mm) ID Tubing
		S01332-ABS01-001	White ABS

New to the Slip Luer range









01116-PP00-004
Female Slip Luer



01332-PP00-004
Female Slip Luer




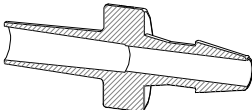
Slip Luers

Component	Cross Section	Part Number	Description
		0118 0118-ABS00-002 0118-RSPC01-001	Female Slip Luer to 1/8" Barb (3mm) ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		03116 03116-ABS00-002 03116-RSPC01-001	Male Slip Luer to 1/16" Barb (1.5mm) ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		03332 03332-ABS00-002 03332-RSPC01-001	Male Slip Luer to 3/32" Barb (2.25mm) ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate

Slip Luers

Slip luers do not incorporate the ISO threads, allowing for quick assembly.

Slip Luers

LUERS	Component	Cross Section	Part Number	Description
			S03332	Male Slip Luer to 3/32" Barb (2.25mm) ID Tubing
			S03332-N01-006	White Nylon
			0318	Male Slip Luer to 1/8" Barb (3mm) ID Tubing
			0318-ABS00-002 0318-RSPC01-001	Clear ABS Lipid Resistant Radiation Stable Polycarbonate
			CP030	Male Slip Luer to 1/8" Barb (3mm) ID Tubing
			CP030-ABS01-001	White ABS

New to the Slip Luer range









7C0303-RSPC01-001
Male Slip Luer Coupler

7



CP142-PP00-004
Female Luer Plug
with Lugs

Luer Plugs & Couplers

Component	Cross Section	Part Number	Description
		02STY 02STY-PP00-004	Female Luer Lock to Stylet Animal Free Polypropylene
		02P 02P-N01-006 02P-PP00-004 02P-PC01-000 02P-RSPC01-005 02P-KY01-000	Female Luer Lock Plug White Nylon Animal Free Polypropylene Clear Polycarbonate Radiation Stable Polycarbonate Kynar
		C0101 C0101-N01-006	Female Slip Luer Coupler White Nylon



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene

KY01-000 | Kynar

ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.

Luer Plugs & Couplers


LUERS	Component	Cross Section	Part Number	Description
			C0202	Female Luer Lock Coupler
			C0202-N01-006	White Nylon
			C0202-PP00-004	Animal Free Polypropylene
			C0202-PC01-000	Clear Polycarbonate
			C0202-RSPC01-005	Radiation Stable Polycarbonate
			C0202-KY01-000	Kynar
			C0303	Male Slip Luer Coupler
			C0303-N01-006	White Nylon
			7C0303	Male Slip Luer Coupler
			7C0303-RSPC01-001	Lipid Resistant Radiation Stable Polycarbonate



Lot Traceability

Injectech products are molded from 100% virgin - lot-traceable raw materials.

Material certifications can be supplied with each order at your request.

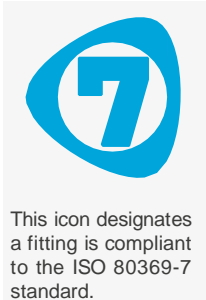

Luer Plugs & Couplers

Component	Cross Section	Part Number	Description
		04PCL 04PCL-N01-006 04PCL-PP00-004 04PCL-PC01-000	Male Luer Lock Plug, Closed Luer White Nylon Animal Free Polypropylene Clear Polycarbonate
		04P 04P-N01-006 04P-PP00-004 04P-PC01-000 04P-RSPC01-005 04P-KY01-000	Male Luer Lock Plug White Nylon Animal Free Polypropylene Clear Polycarbonate Radiation Stable Polycarbonate Kynar
		L0103 L0103-RSPC01-001	Female/Male Luer Slip Elbow Lipid Resistant Radiation Stable Polycarbonate





Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene
KY01-000 | Kynar
ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.

Luer Plugs & Couplers

LUERS	Component	Cross Section	Part Number	Description
			CP029	Male Luer Lock to Modified Luer Taper
			CP029-N01-006	White Nylon
			CP120	Double Ended Cap
			CP120-PP00-004	Animal Free Polypropylene
			CP142	Female Luer Plug with Lugs
			CP142-PP00-004	Animal Free Polypropylene

New to the Slip Luer range





T010101-PP00-004
Female Slip Luer Tee



L03R18-RSPC01-001
Male Slip Luer Elbow

Luer Plugs & Couplers

Component	Cross Section	Part Number	Description
		T010101 T010101-PP00-004	Female Slip Luer Tee Animal Free Polypropylene

LUERS



Injectech's lot traceability

All our products are molded from 100% virgin, lot-traceable raw materials.
Material certifications can be supplied with each order at your request.



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene

KY01-000 | Kynar

ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.




Rotating Luers

Component	Cross Section	Part Number	Description
		03R02C	Rotating Male Luer to Female Luer Lock Coupler
		03R02C-ABS00-002 03R02C-RSPC01-001	Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		03R116	Rotating Male Luer to 1/16" Barb (1.5mm) ID Tubing
		03R116-ABS00-002 03R116-RSPC01-001	Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		03R332	Rotating Male Luer to 3/32" Barb (2.25mm) ID Tubing
		03R332-ABS00-002 03R332-RSPC01-001	Clear ABS Lipid Resistant Radiation Stable Polycarbonate

Rotating Luers

Rotating luers allow you to color code your connections. They are also a useful interface when connecting luers in spaces with limited axial movement.

Rotating Luers

Component	Cross Section	Part Number	Description
		03R18 03R18-ABS00-002 03R18-RSPC01-001	Rotating Male Luer to 1/8" Barb (3mm) ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		03R532 03R532-ABS00-002 03R532-RSPC01-001	Rotating Male Luer to 5/32" Barb (4mm) ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		03R316 03R316-ABS00-002 03R316-RSPC01-001	Rotating Male Luer to 3/16" Barb (4.75mm) ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene


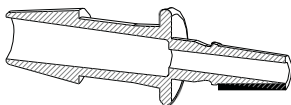
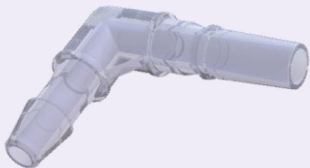

KY01-000 | Kynar

ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.

Rotating Luers

Component	Cross Section	Part Number	Description
 		03R14	Rotating Male Luer to 1/4" Barb (6.25mm) ID Tubing
		03R14-ABS00-002 03R14-RSPC01-001	Clear ABS Lipid Resistant Radiation Stable Polycarbonate
 		L03R18	Rotating Male Slip Luer Elbow to 1/8" Barb (3mm) ID Tubing
		L03R18-RSPC01-001	Lipid Resistant Radiation Stable Polycarbonate

Don't see what you're looking for?


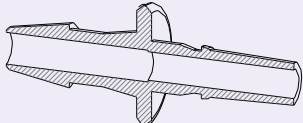

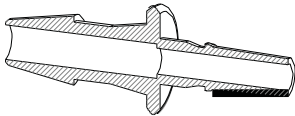
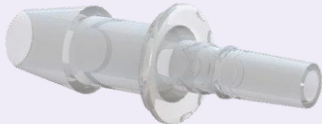
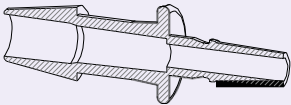
We can also provide

**SAMPLE
KITS**

**CUSTOM
FITTINGS**

ASSEMBLIES

Rotating Luers

Component	Cross Section	Part Number	Description
		03R532CP 03R532CP-ABS00-002 03R532CP-RSPC01-001	Rotating Male Luer to 5/32" High Flow Barb (4mm) ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		03R316CP 03R316CP-ABS00-002 03R316CP-RSPC01-001	Rotating Male Luer to 3/16" High Flow Barb (4.75mm) ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		03R14CP 03R14CP-ABS00-002 03R14CP-RSPC01-001	Rotating Male Luer to 1/4" High Flow Barb (6.25mm) ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate









Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene
KY01-000 | Kynar
ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.



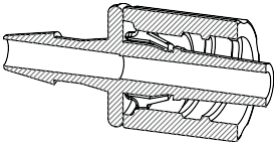
Rotating Luers with Snap Ring

LUERS	Component	Cross Section	Part Number	Description
			RSR	Rotating Snap Ring
			RSR-ABS00-002 RSR-N01-006 RSR-N02-002 RSR-N03-006 RSR-N05-002 RSR-PC01-000 RSR-RSPC01-001	Clear ABS White Nylon Black Nylon Red Nylon Blue Nylon Clear Polycarbonate Lipid Resistant Radiation Stable Polycarbonate
			A03R02C	Rotating Male Luer to Female Luer Lock Coupler with Snap Ring
			A03R02C-ABS00-002 A03R02C-RSPC01-001	Clear ABS Lipid Resistant Radiation Stable Polycarbonate
			A03R116	Rotating Male Luer with Snap Ring to 1/16" Barb (1.5mm) ID Tubing
			A03R116-ABS00-002 A03R116-RSPC01-001	Clear ABS Lipid Resistant Radiation Stable Polycarbonate

Rotating Luers with Snap Ring

Products are shipped pre-assembled and are available with snap rings in multiple colored options.

Rotating Luers with Snap Ring

Component	Cross Section	Part Number	Description
		A03R332 A03R332-ABS00-002 A03R332-RSPC01-001	Rotating Male Luer with Snap Ring to 3/32" Barb (2.25mm) ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		A03R18 A03R18-ABS00-002 A03R18-RSPC01-001	Rotating Male Luer with Snap Ring to 1/8" Barb (3mm) ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		A03R532 A03R532-ABS00-002 A03R532-RSPC01-001	Rotating Male Luer with Snap Ring to 5/32" Barb (4mm) ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene


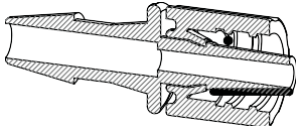
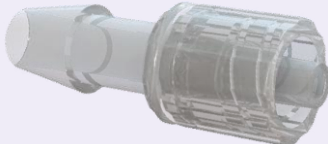
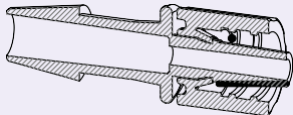

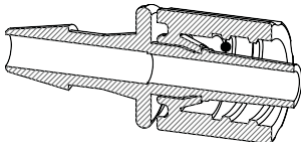
KY01-000 | Kynar

ABS00-002 | Clear ABS




Multiple color options available for Nylon components. Subject to minimum order quantities.

Rotating Luers with Snap Ring




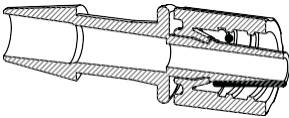
LUERS	Component	Cross Section	Part Number	Description
			A03R316	Rotating Male Luer with Snap Ring to 3/16" Barb (4.75mm) ID Tubing
			A03R316-ABS00-002 A03R316-RSPC01-001	Clear ABS Lipid Resistant Radiation Stable Polycarbonate
			A03R14	Rotating Male Luer with Snap Ring to 1/4" Barb (6.25mm) ID Tubing
			A03R14-ABS00-002 A03R14-RSPC01-001	Clear ABS Lipid Resistant Radiation Stable Polycarbonate
			A03R532CP	Rotating Male Luer with Snap Ring to 5/32" High Flow Barb (4mm) ID Tubing
			A03R532CP-ABS00-002 A03R532CP-RSPC01-001	Clear ABS Lipid Resistant Radiation Stable Polycarbonate

Rotating Luers with Snap Ring


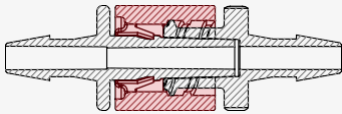
Products are shipped pre-assembled and are available with snap rings in multiple colored options.

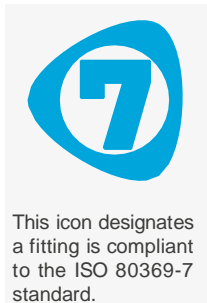

Rotating Luers with Snap Ring

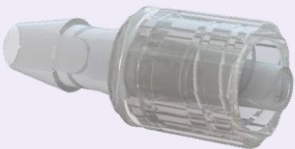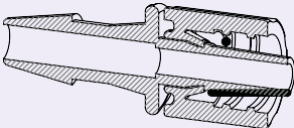Component	Cross Section	Part Number	Description
		A03R316CP A03R316CP-ABS00-002 A03R316CP-RSPC01-001	Rotating Male Luer with Snap Ring to 3/16" High Flow Barb 4.75mm ID Tubing Clear ABS Lipid Resistant Radiation Stable Polycarbonate
		A03R14CP A03R14CP-ABS00-002 A03R14CP-PC01-000 A03R14CP-RSPC01-001	Rotating Male Luer with Snap Ring to 1/4" High Flow Barb (6.25mm) ID Tubing Clear ABS Clear Polycarbonate Lipid Resistant Radiation Stable Polycarbonate









LUERS



ABS

Male Rotating Luer - Snap Ring Assembly

The threaded snap ring rotates independently, allowing luers to connect without twisting the tubing.



Polycarbonate RSPC Red Nylon Blue Nylon White Nylon Yellow Nylon Green Nylon Black Nylon

Color/Material Options for Rotating Male Luer Snap Rings



Panel Mounts

Injectech panel mounts are tested for compliance to international standard ISO 80369-7 to ensure compatibility and a leak-tight fit.

Lot-traceable



- Manufactured with 100% virgin materials. Material and product certifications are available on request
- Manufactured and packaged in an ISO Class 8 cleanroom environment
- Manufactured to ISO 13485 quality system standards

Range of Available Materials

- Nylon
- Animal Free Polypropylene
- Kynar











Panel Mounts

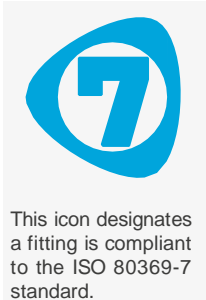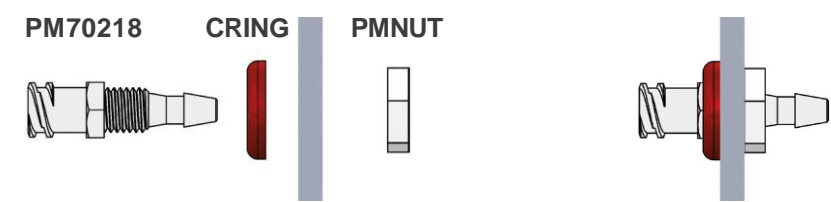Injectech manufactures the only ISO 80369-7 certified panel mounts in plastic components. Panel mount threads are 1/4-28 UNF.



This icon designates a fitting is compliant to the ISO 80369-7 standard.

Panel Mounts

Component	Cross Section	Part Number	Description
		PM702116 PM702116-N01-006 PM702116-PP00-004 Contact us	Panel Mount Female Luer Lock to 1/16" Barb (1.5mm) ID Tubing White Nylon Animal Free Polypropylene Kynar
		PM702332 PM702332-N01-000 PM702332-PP00-004 Contact us	Panel Mount Female Luer Lock to 3/32" Barb (2.25mm) ID Tubing White Nylon Animal Free Polypropylene Kynar
		PM70218 PM70218-N01-000 PM70218-PP00-004 Contact us	Panel Mount Female Luer Lock to 1/8" Barb (3mm) ID Tubing White Nylon Animal Free Polypropylene Kynar
		PMNUT PMNUT-N00-006	Panel Mount Lock Nut 1/4-28 UNF with 7/16" Hex Natural Nylon
		CRING CRING1 CRING2 CRING3 CRING4 CRING5 CRING7	Panel Mount Color Code Ring Color Options Available White Nylon Black Nylon Red Nylon Green Nylon Blue Nylon Yellow Nylon

PANEL MOUNTS



Spikes

Injectech spikes are tested for compliance to international standard ISO 594-1 to ensure compatibility and a leak-tight fit.

Lot-traceable

- Manufactured with 100% virgin materials. Material and product certifications are available on request
- Manufactured and packaged in an ISO Class 8 cleanroom environment
- Manufactured to ISO 13485 quality system standards







Range of Available Materials


- ABS
- Nylon
- Animal Free Polypropylene

Spikes

Typically for dialysis, IV and nuclear medicine applications. CP026 Spike with CP027 Cap may be ordered pre-assembled.

Spikes

Component	Cross Section	Part Number	Description
		CP024 CP024-ABS01-001	Spike to 1/4" OD Bond-In Port (non-vented) White ABS
		CP026 CP026-N01-000	Spike to Male Slip Luer (non-vented) White Nylon
		CP027 CP027-N01-000 CP027-PP00-004	Cap for CP026 Spike White Nylon Animal Free Polypropylene

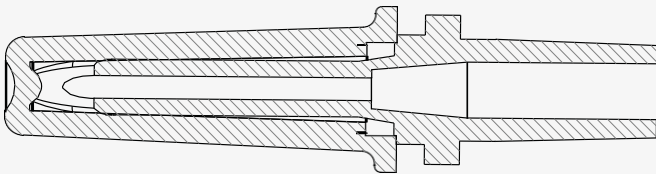

CP026 / CP027 - Spike + Cap Assembly

SPIKES



Check Valves / Filters

Injectech's line of check valves and filters are ISO 594-1, 594-2 and 80369-7 certified.

Lot-traceable

- Manufactured with 100% virgin materials. Material and product certifications are available on request
- Manufactured and packaged in an ISO Class 8 cleanroom environment
- Manufactured to ISO 13485 quality system standards

Range of Available Materials

- ABS
- SAN Blue/MABS
- Radiation Stable Polycarbonate
- Polystyrene
- Silicone





Check Valves / Filters

Injectech offers a wide range of check valves and filters. This product line was created with the intent of offering customized solutions, whether it be different configurations or reverse flow features.

Check Valves

Component	Cross Section	Part Number	Description
		CV0001	Female Luer to Male Luer Cracking Pressure ≤ 1 psi Back Pressure 8 bar (116psi) Silicone Disk Molded-in Flow Direction Indicator
		CV0001	Radiation Stable Polycarbonate
FLOW DIRECTION →→→			
		CV0004	Male Luer to 3.1mm Port Cracking Pressure 2.9 psi Back Pressure 21 bar (116psi) Silicone Disk
		CV0004	SAN Blue-Transparent/MABS -Transparent
FLOW DIRECTION →→→			
		CV0005	3.1 mm Port to 4.2mm Port Cracking Pressure ≤ 1 psi Back Pressure 8 bar (116psi) Silicone Disk Molded-in Flow Direction Indicator
		CV0005	SAN Blue-Transparent/Radiation Stable Polycarbonate
FLOW DIRECTION →→→			

Check Valves

Component	Cross Section	Part Number	Description
	 FLOW DIRECTION → → →	CV0006 CV0006	Female Luer to 4.1mm Port Cracking Pressure 2.9 psi Back Pressure 21 bar (116psi) Silicone Disk Molded-in Flow Direction Indicator SAN Blue-Transparent/MABS -Transparent
	 FLOW DIRECTION → → →	CV0007 CV0007	Female Luer to Port for 3mm x 4.1mm Cracking Pressure ≤ 1 psi Back Pressure 8 bar (116psi) Silicone Disk Molded-in Flow Direction Indicator Radiation Stable Polycarbonate







When quality counts, you can trust the reliable products Injectech supplies.











This icon designates a fitting is compliant to the ISO 80369-7 standard.

Check Valves

Component	Cross Section	Part Number	Description
 		CV704116	Check Valve Male Luer Lock to 1/16" Barb (1.5mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	← ← ← FLOW DIRECTION	CV704116	
 		RCV704116	Reverse Check Valve Male Luer Lock to 1/16" Barb (1.5mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	FLOW DIRECTION → → →	RCV704116	
 		CV704332	Check Valve Male Luer Lock to 3/32" Barb (2.25mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	← ← ← FLOW DIRECTION	CV704332	



Check Valves

Component	Cross Section	Part Number	Description
	 FLOW DIRECTION → → →	RCV704332 RCV704332	Reverse Check Valve Male Luer Lock to 3/32" Barb (2.25mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 ← ← ← FLOW DIRECTION	CV70418 CV70418	Check Valve Male Luer Lock to 1/8" Barb (3mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 FLOW DIRECTION → → →	RCV70418 RCV70418	Reverse Check Valve Male Luer Lock to 1/8" Barb (3mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone






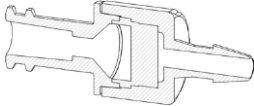


This icon designates a fitting is compliant to the ISO 80369-7 standard.

Check Valves

Component	Cross Section	Part Number	Description
		CV702116 CV702116	Check Valve Female Luer Lock to 1/16" Barb (1.5mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION →→→			
		RCV702116 RCV702116	Reverse Check Valve Female Luer Lock to 1/16" Barb (1.5mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION →→→			
		CV702332 CV702332	Check Valve Female Luer Lock to 3/32" Barb (2.25mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION →→→			









Check Valves

Component	Cross Section	Part Number	Description
	 FLOW DIRECTION → → →	RCV702332 RCV702332	Reverse Check Valve Female Luer Lock to 3/32" Barb (2.25mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 FLOW DIRECTION → → →	CV70218 CV70218	Check Valve Female Luer Lock to 1/8" Barb (3mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 FLOW DIRECTION → → →	RCV70218 RCV70218	Reverse Check Valve Female Luer Lock to 1/8" Barb (3mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone









This icon designates a fitting is compliant to the ISO 80369-7 standard.







Check Valves

Component	Cross Section	Part Number	Description
 		CV70402 CV70402	Check Valve Male Luer Lock to Female Luer Lock Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
← ← ← FLOW DIRECTION			
 		RCV70402 RCV70402	Reverse Check Valve Male Luer Lock to Female Luer Lock Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION → → →			
 		CV70202 CV70202	Check Valve Female Luer Lock to Female Luer Lock Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION → → →			







Tube to Tube Check Valves

Component	Cross Section	Part Number	Description
	 <p>FLOW DIRECTION → → →</p>	CV116 CV116	Check Valve 1/16" Barbs (1.5mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 <p>FLOW DIRECTION → → →</p>	CV332 CV332	Check Valve 3/32" Barbs (2.25mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 <p>FLOW DIRECTION → → →</p>	CV18 CV18	Check Valve 1/8" Barbs (3mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone

Tube to Tube Reducing Check Valves


Component	Cross Section	Part Number	Description
 		CV116R332 CV116R332	Check Valve Flow 1/16" to 3/32" Barbs (1.5mm to 2.25mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION →→→			
 		CV116R18 CV116R18	Check Valve Flow 1/16" to 1/8" Barbs (1.5mm to 3mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION →→→			
 		CV332R116 CV332R116	Check Valve Flow 3/32" to 1/16" Barbs (2.25mm to 1.5mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION →→→			

Tube to Tube Reducing Check Valves







Component	Cross Section	Part Number	Description
	 FLOW DIRECTION → → →	CV332R18 CV332R18	Check Valve Flow 3/32" to 1/8" Barbs (2.25mm to 3mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 FLOW DIRECTION → → →	CV18R116 CV18R116	Check Valve Flow 1/8" to 1/16" Barbs (3mm to 1.5mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 FLOW DIRECTION → → →	CV18R332 CV18R332	Check Valve Flow 1/8" to 3/32" Barbs (3mm to 2.25mm) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone

Filtered Check Valves

The following components incorporate a 0.2 micron filter with a check valve. This allows users to filter and control flow with one fitting instead of two.

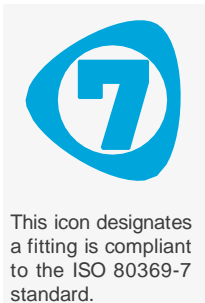







Filtered Check Valves

Component	Cross Section	Part Number	Description
		FCV704116 FCV704116	Male Luer Lock to 1/16" Barb (1.5mm) Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
← ← ← FLOW DIRECTION			
		RFCV704116 RFCV704116	Reverse Male Luer Lock to 1/16" Barb (1.5mm) Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION → → →			
		FCV704332 FCV704332	Male Luer Lock to 3/32" Barb (2.25mm) Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
← ← ← FLOW DIRECTION			

CHECK VALVES
FILTERS


Filtered Check Valves

Component	Cross Section	Part Number	Description
	 FLOW DIRECTION → → →	RFCV704332 RFCV704332	Reverse Male Luer Lock to 3/32" Barb (2.25mm) Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 ← ← ← FLOW DIRECTION	FCV70418 FCV70418	Male Luer Lock to 1/8" Barb (3mm) Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 FLOW DIRECTION → → →	RFCV70418 RFCV70418	Reverse Male Luer Lock to 1/8" Barb (3mm) Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone






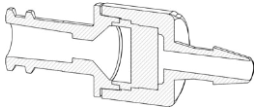


This icon designates a fitting is compliant to the ISO 80369-7 standard.

Filtered Check Valves

Component	Cross Section	Part Number	Description
		FCV702116 FCV702116	Female Luer Lock to 1/16" Barb (1.5mm) Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION → → →			
		RFCV702116 RFCV702116	Reverse Female Luer Lock to 1/16" Barb (1.5mm) Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION → → →			
		FCV702332 FCV702332	Female Luer Lock to 3/32" Barb (2.25mm) Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION → → →			




Filtered Check Valves

Component	Cross Section	Part Number	Description
	 FLOW DIRECTION → → →	RFCV702332 RFCV702332	Reverse Female Luer Lock to 3/32" Barb (2.25mm) Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 FLOW DIRECTION → → →	FCV70218 FCV70218	Female Luer Lock to 1/8" Barb (3mm) Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 FLOW DIRECTION → → →	RFCV70218 RFCV70218	Reverse Female Luer Lock to 1/8" Barb (3mm) Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone







Custom Check Valves, Filters and Filtered Check Valves

The options offered for our check valves, filters and filtered check valves are completely customizable to your project needs. The following fittings are available in ABS, Polystyrene and Silicone and the filter is 0.2 microns.






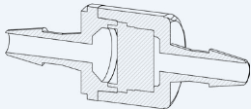


This icon designates a fitting is compliant to the ISO 80369-7 standard.







Filtered Check Valves

Component	Cross Section	Part Number	Description
 		FCV70402 FCV70402	Filtered Check Valve Male Luer Lock to Female Luer Lock Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
← ← ← FLOW DIRECTION			
 		RFCV70402 RFCV70402	Reverse Filtered Check Valve Male Luer Lock to Female Luer Lock Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION → → →			
 		FCV70202 FCV70202	Filtered Check Valve Female Luer Lock to Female Luer Lock Hydrophobic Bacterial Filter (0.2 microns) Cracking Pressure ≤ 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION → → →			







Tube to Tube Filtered Check Valves

Component	Cross Section	Part Number	Description
	 FLOW DIRECTION → → →	FCV116 FCV116	Filtered Check Valve 1/16" Barbs (1.5mm) Cracking Pressure < 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 FLOW DIRECTION → → →	FCV332 FCV332	Filtered Check Valve 3/32" Barbs (2.25mm) Cracking Pressure < 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 FLOW DIRECTION → → →	FCV18 FCV18	Filtered Check Valve 1/8" Barbs (3mm) Cracking Pressure < 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone

Tube to Tube Reducing Filtered Check Valves

Component	Cross Section	Part Number	Description
 		FCV116R332 FCV116R332	Filtered Check Valve Flow 1/16" to 3/32" Barbs (1.5mm to 2.25mm) Cracking Pressure \leq 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION →→→			
 		FCV116R18 FCV116R18	Filtered Check Valve Flow 1/16" to 1/8" Barbs (2.25mm to 3mm) Cracking Pressure \leq 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION →→→			
 		FCV332R116 FCV332R116	Filtered Check Valve Flow 3/32" to 1/16" Barbs (1.5mm to 1.5mm) Cracking Pressure \leq 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
FLOW DIRECTION →→→			




Tube to Tube Reducing Filtered Check Valves

Component	Cross Section	Part Number	Description
	 FLOW DIRECTION → → →	FCV332R18 FCV332R18	Filtered Check Valve Flow 3/32" to 1/8" Barbs (2.25mm to 3mm) Cracking Pressure \leq 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 FLOW DIRECTION → → →	FCV18R116 FCV18R116	Filtered Check Valve Flow 1/8" to 1/16" Barbs (3mm to 1.5mm) Cracking Pressure \leq 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone
	 FLOW DIRECTION → → →	FCV18R332 FCV18R332	Filtered Check Valve Flow 1/8" to 3/32" Barbs (3mm to 2.25mm) Cracking Pressure \leq 8 mbar Back Pressure 2 bar (29psi) Silicone Disk ABS, Polystyrene, Silicone








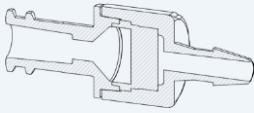
This icon designates a fitting is compliant to the ISO 80369-7 standard.

Filters

Component	Cross Section	Part Number	Description
 		F704116 F704116	Male Luer Lock to 1/16" Barb (1.5mm) Hydrophobic Bacterial Filter (0.2 microns) ABS
 		F704332 F704332	Male Luer Lock to 3/32" Barb (2.25mm) Hydrophobic Bacterial Filter (0.2 microns) ABS
 		F70418 F70418	Male Luer Lock to 1/8" Barb (3mm) Hydrophobic Bacterial Filter (0.2 microns) ABS







Filters

Component	Cross Section	Part Number	Description
		F702116 F702116	Female Luer Lock to 1/16" Barb (1.5mm) Hydrophobic Bacterial Filter (0.2 microns) ABS
		F702332 F702332	Female Luer Lock to 3/32" Barb (2.25mm) Hydrophobic Bacterial Filter (0.2 microns) ABS
		F70218 F70218	Female Luer Lock to 1/8" Barb (3mm) Hydrophobic Bacterial Filter (0.2 microns) ABS



This icon designates a fitting is compliant to the ISO 80369-7 standard.

Filters

Component	Cross Section	Part Number	Description
 		F70402	Filter Male Luer Lock to Female Luer Lock Hydrophobic Bacterial Filter (0.2 microns)
		F70402	ABS
 		F70202	Filter Female Luer Lock to Female Luer Lock Hydrophobic Bacterial Filter (0.2 microns)
		F70202	ABS

Don't see what you're looking for?

We can also provide






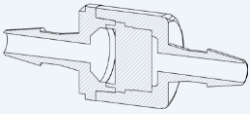
**SAMPLE
KITS**

**CUSTOM
FITTINGS**







ASSEMBLIES



Tube to Tube Filters

Component	Cross Section	Part Number	Description
		F116 F116	Filter 1/16" Barbs (1.5mm) ABS
		F332 F332	Filter 3/32" Barbs (2.25mm) ABS
		F18 F18	Filter 1/8" Barbs (3mm) ABS

Tube to Tube Reducing Filters

Component	Cross Section	Part Number	Description
		F332R116	Filter 3/32" to 1/16" Barbs (2.25mm to 1.5mm)
		F332R116	ABS
		F18R116	Filter 1/8" to 1/16" Barbs (3mm to 1.5mm)
		F18R116	ABS
		F18R332	Filter 1/8" to 3/32" Barbs (3mm to 2.25mm)
		F18R332	ABS



Tube to Tube

Injectech tube to tube connectors are available in several different styles for the most precise fit into tubing.

Lot-traceable

- Manufactured with 100% virgin materials. Material and product certifications are available on request
- Manufactured and packaged in an ISO Class 8 cleanroom environment
- Manufactured to ISO 13485 quality system standards

Range of Available Materials

- Nylon
- Animal Free Polypropylene
- Clear Polycarbonate
- Kynar
- Clear Copolyester

Tube to Tube Barbed Connectors





Fluid Control:

A key component of leading-edge biomedical technologies.

Single barb design advantages:

- Leak potential is minimized because there is no parting line on the barb's sealing surface.
- Single barbs allow for maximum relaxation of the tubing behind the barb, resulting in a remarkable non-slip grip.
- The geometry of the barb is designed for ease of assembly, without compromising the fitting's strength or pressure capability.

Straight Connectors

Component	Cross Section	Part Number	Description
 		IC116	Straight Connector with 1/16" Barbs (1.5mm) ID Tubing
		IC116-N01-006 IC116-PP00-004 IC116-PC01-000 IC116-KY01-000	White Nylon Animal Free Polypropylene Clear Polycarbonate Kynar
 		CR116	Straight Connector with 1/16" Rigid Barbs (1.5mm) ID Tubing Rigid barb facilitates connection to high durometer tubing
		CR116-N01-006 CR116-PP00-004 CR116-KY01-000	White Nylon Animal Free Polypropylene Kynar
 		IC332	Straight Connector with 3/32" Barbs (2.25mm) ID Tubing
		IC332-N01-006 IC332-PP00-004 IC332-KY01-000	White Nylon Animal Free Polypropylene Kynar



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene


KY01-000 | Kynar

ABS00-002 | Clear ABS









Multiple color options available for Nylon components. Subject to minimum order quantities.

Straight Connectors

Component	Cross Section	Part Number	Description
		CR332 CR332-N01-006 CR332-PP00-004 CR332-KY01-000	Straight Connector with 3/32" Rigid Barbs (2.25mm) ID Tubing Rigid barb facilitates connection to high durometer tubing White Nylon Animal Free Polypropylene Kynar
		IC18 IC18-N01-006 IC18-PP00-004 IC18-RSPC01-005 IC18-KY01-000	Straight Connector with 1/8" Barbs (3mm) ID Tubing White Nylon Animal Free Polypropylene Radiation Stable Polycarbonate Kynar
		CR18 CR18-N01-006 CR18-PP00-004 CR18-KY01-000	Straight Connector with 1/8" Rigid Barbs (3mm) ID Tubing Rigid barb facilitates connection to high durometer tubing White Nylon Animal Free Polypropylene Kynar







Straight Connectors

Component	Cross Section	Part Number	Description
		IC532	Straight Connector with 5/32" Barbs (4mm) ID Tubing
		IC532-N00-006	Natural Nylon
		IC532-PP00-004	Animal Free Polypropylene
		IC532-KY01-000	Kynar
		IC532-COPE00-000	Clear Copolyester
		IC316	Straight Connector with 3/16" Barbs (4.75mm) ID Tubing
		IC316-N00-006	Natural Nylon
		IC316-PP00-004	Animal Free Polypropylene
		IC316-KY01-000	Kynar
		IC316-COPE00-000	Clear Copolyester
		IC14	Straight Connector with 1/4" Barbs (6.25mm) ID Tubing
		IC14-N00-006	Natural Nylon
		IC14-PP00-004	Animal Free Polypropylene
		IC14-KY01-000	Kynar
		IC14-COPE00-000	Clear Copolyester

Single Barb Design

- No mold parting line on the sealing surface minimizing potential leaks
- Single barbs allow for maximum relaxation of the tubing behind the barb resulting in a remarkable non-slip grip
- Geometry of the barb is designed for easy assembly without compromising the fitting's strength or pressure capability

Straight Reducing Connectors

Component	Cross Section	Part Number	Description
 		C332R116	Straight Reducing Connector 3/32" to 1/16" Barbs (2.25mm to 1.5mm) ID Tubing
		C332R116-N01-006	White Nylon
		C332R116-PP00-004	Animal Free Polypropylene
		C332R116-KY01-000	Kynar
 		CR332R116	Straight Reducing Connector 3/32" to 1/16" Rigid Barbs (2.25mm to 1.5mm) ID Tubing Rigid barb facilitates connection to high durometer tubing
		CR332R116-N01-006	White Nylon
		CR332R116-PP00-004	Animal Free Polypropylene
		CR332R116-KY01-000	Kynar
 		C18R116	Straight Reducing Connector 1/8" to 1/16" Barbs (3mm to 1.5mm) ID Tubing
		C18R116-N01-006	White Nylon
		C18R116-PP00-004	Animal Free Polypropylene
		C18R116-KY01-000	Kynar

Straight Reducing Connectors

Component	Cross Section	Part Number	Description
		CR18R116 CR18R116-N01-006 CR18R116-PP00-004 CR18R116-KY01-000	Straight Reducing Connector 1/8" to 1/16" Rigid Barbs (3mm to 1.5mm) ID Tubing Rigid barb facilitates connection to high durometer tubing White Nylon Animal Free Polypropylene Kynar
		C18R332 C18R332-N01-006 C18R332-PP00-004 C18R332-KY01-000	Straight Reducing Connector 1/8" to 3/32" Barbs (3mm to 2.25mm) ID Tubing White Nylon Animal Free Polypropylene Kynar
		CR18R332 CR18R332-N01-006 CR18R332-PP00-004 CR18R332-KY01-000	Straight Reducing Connector 1/8" to 3/32" Rigid Barbs (3mm to 2.25mm) ID Tubing Rigid barb facilitates connection to high durometer tubing White Nylon Animal Free Polypropylene Kynar



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene







KY01-000 | Kynar

ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.

Straight Reducing Connectors

Component	Cross Section	Part Number	Description
		C532R332 C532R332-N00-006 C532R332-PP00-004 C532R332-KY01-000	Straight Reducing Connector 5/32" to 3/32" Barbs (4mm to 2.25mm) ID Tubing Natural Nylon Animal Free Polypropylene Kynar
		C532R18 C532R18-N00-006 C532R18-PP00-004 C532R18-KY01-000	Straight Reducing Connector 5/32" to 1/8" Barbs (4mm to 3mm) ID Tubing Natural Nylon Animal Free Polypropylene Kynar
		C316R332 C316R332-N00-006 C316R332-PP00-004 C316R332-KY01-000	Straight Reducing Connector 3/16" to 3/32" Barbs (4.75mm to 2.25mm) ID Tubing Natural Nylon Animal Free Polypropylene Kynar

Samples are available

Please contact us for samples to test in your application.

Straight Reducing Connectors

Component	Cross Section	Part Number	Description
		C316R18 C316R18-N00-006 C316R18-PP00-004 C316R18-KY01-000	Straight Reducing Connector 3/16" to 1/8" Barbs (4.75mm to 3mm) ID Tubing Natural Nylon Animal Free Polypropylene Kynar
		C316R532 C316R532-N00-006 C316R532-PP00-004 C316R532-KY01-000	Straight Reducing Connector 3/16" to 5/32" Barbs (4.75mm to 4mm) ID Tubing Natural Nylon Animal Free Polypropylene Kynar
		C14R18 C14R18-N00-006 C14R18-PP00-004 C14R18-KY01-000	Straight Reducing Connector 1/4" to 1/8" Barbs (6.25mm to 3mm) ID Tubing Natural Nylon Animal Free Polypropylene Kynar



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene



KY01-000 | Kynar

ABS00-002 | Clear ABS









Multiple color options available for Nylon components. Subject to minimum order quantities.

Straight Reducing Connectors

Component	Cross Section	Part Number	Description
		C14R532	Straight Reducing Connector 1/4" to 5/32" Barbs (6.25mm to 4mm) ID Tubing
		C14R532-N00-006	Natural Nylon
		C14R532-PP00-004	Animal Free Polypropylene
		C14R532-KY01-000	Kynar
		C14R316	Straight Reducing Connector 1/4" to 3/16" Barbs (6.25mm to 4.75mm) ID Tubing
		C14R316-N00-006	Natural Nylon
		C14R316-PP00-004	Animal Free Polypropylene
		C14R316-KY01-000	Kynar
		C116R132	Straight Reducing Connector 1/16" Barbs to 1/32" Barbs (3mm to 0.8mm) ID Tubing
		C116R132-KY01-000	Kynar

Elbow Connectors

Component	Cross Section	Part Number	Description
		IL116	Elbow Connector with 1/16" Barbs (1.5mm) ID Tubing
		IL116-N01-006	White Nylon
		IL116-PP00-004	Animal Free Polypropylene
		IL116-KY00-001	Kynar
		LR116	Elbow Connector with 1/16" Rigid Barbs (1.5mm) ID Tubing
		LR116-N01-006	Rigid barb facilitates connection to high durometer tubing
		LR116-PP00-004	White Nylon
		LR116-KY01-000	Animal Free Polypropylene
			Kynar
		IL332	Elbow Connector with 3/32" Barbs (2.25mm) ID Tubing
		IL332-N01-006	White Nylon
		IL332-PP00-004	Animal Free Polypropylene
		IL332-KY01-000	Kynar



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene







KY01-000 | Kynar

ABS00-002 | Clear ABS









Multiple color options available for Nylon components. Subject to minimum order quantities.

Elbow Connectors

Component	Cross Section	Part Number	Description
		L332 L332-N01-006 L332-PP00-004 L332-KY01-000	Square Grip Elbow Connector with 3/32" Barbs (2.25mm) ID Tubing Aggressive barb facilitates connection to softer low durometer tubing White Nylon Animal Free Polypropylene Kynar
		IL18 IL18-N01-006 IL18-PP00-004 IL18-KY01-000	Elbow Connector with 1/8" Barbs (3mm) ID Tubing White Nylon Animal Free Polypropylene Kynar
		LR18 LR18-N01-006 LR18-PP00-004 LR18-KY01-000	Elbow Connector with 1/8" Rigid Barbs (3mm) ID Tubing Rigid barb facilitates connection to high durometer tubing White Nylon Animal Free Polypropylene Kynar

Elbow Connectors

Component	Cross Section	Part Number	Description
		IL532	Elbow Connector with 5/32" Barbs (4mm) ID Tubing
		IL532-N00-006	Natural Nylon
		IL532-PP00-004	Animal Free Polypropylene
		IL532-KY01-000	Kynar
		IL532-COPE00-000	Clear Copolyester
		IL316	Elbow Connector with 3/16" Barbs (4.75mm) ID Tubing
		IL316-N00-006	Natural Nylon
		IL316-PP00-004	Animal Free Polypropylene
		IL316-KY01-000	Kynar
		IL316-COPE00-000	Clear Copolyester
		IL14	Elbow Connector with 1/4" Barbs (6.25mm) ID Tubing
		IL14-N00-006	Natural Nylon
		IL14-PP00-004	Animal Free Polypropylene
		IL14-KY01-000	Kynar
		IL14-COPE00-000	Clear Copolyester





Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene
KY01-000 | Kynar
ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.

Reducing Elbow Connectors

Component	Cross Section	Part Number	Description
 		IL14R18	Elbow Reducing Connector with 1/4" to 1/8" Barbs (6.25mm to 3mm) ID Tubing
		IL14R18-N00-006	Natural Nylon
		IL14R18-PP00-004	Animal Free Polypropylene
		IL14R18-KY01-000	Kynar



Barb Design

Technical information regarding barb dimensions can be found on p126 at the back of this catalog.

Tee Connectors

Component	Cross Section	Part Number	Description
		IT116	Tee Connector with 1/16" Barbs (1.5mm) ID Tubing
		IT116-N01-006 IT116-PP00-004 IT116-KY01-000	White Nylon Animal Free Polypropylene Kynar
		IT332	Tee Connector with 3/32" Barbs (2.25mm) ID Tubing
		IT332-N01-006 IT332-PP00-004 IT332-KY01-000	White Nylon Animal Free Polypropylene Kynar
		IT18	Tee Connector with 1/8" Barbs (3mm) ID Tubing
		IT18-N01-006 IT18-PP00-004 IT18-KY01-000 IT18-COPE00-000	White Nylon Animal Free Polypropylene Kynar Clear Copolyester



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene







KY01-000 | Kynar

ABS00-002 | Clear ABS




Multiple color options available for Nylon components. Subject to minimum order quantities.


Tee Connectors

Component	Cross Section	Part Number	Description
		TR18 TR18-N01-006 TR18-PP00-004 TR18-KY01-000	Tee Connector with Rigid 1/8" Barbs (3mm) ID Tubing Rigid barb facilitates connection to high durometer tubing White Nylon Animal Free Polypropylene Kynar
		IT532 IT532-N00-006 IT532-PP00-004 IT532-KY01-000 IT532-COPE00-000	Tee Connector with 5/32" Barbs (4mm) ID Tubing Natural Nylon Animal Free Polypropylene Kynar Clear Copolyester
		IT316 IT316-N00-006 IT316-PP00-004 IT316-KY01-000 IT316-COPE00-000	Tee Connector with 3/16" Barbs (4.75mm) ID Tubing Natural Nylon Animal Free Polypropylene Kynar Clear Copolyester

Tee Connectors

Component	Cross Section	Part Number	Description
		IT14	Tee Connector with 1/4" Barbs (6.25mm) ID Tubing
		IT14-N00-006	Natural Nylon
		IT14-PP00-004	Animal Free Polypropylene
		IT14-KY01-000	Kynar
		IT14-COPE00-000	Clear Copolyester

Injectech's engineering team is built around quality and performance.

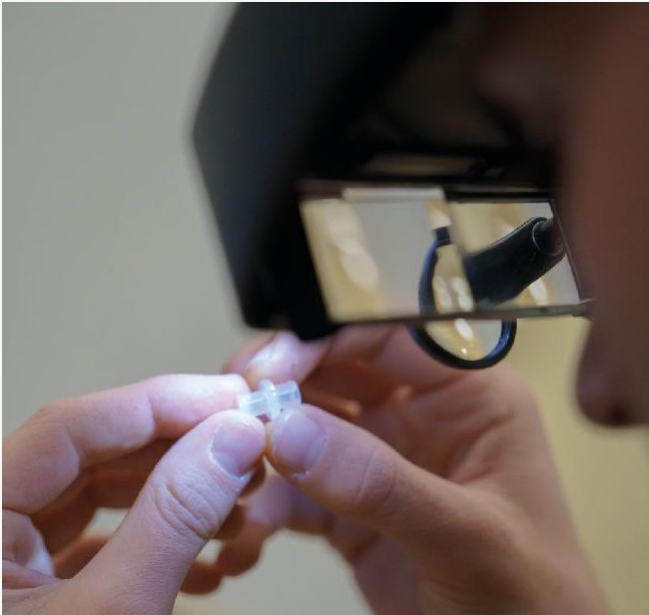

As a custom injection molding manufacturer, we can work with you to bring an initial concept of a part through design, development and process validation. Our extensive mold qualification process gives customers the satisfaction that each part produced will meet their requirements.



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene







KY01-000 | Kynar

ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.

Tee Reducing Connectors

Component	Cross Section	Part Number	Description
 		T1169018	Tee Reducing Connector with 1/16" Barbs to 1/8" Barbed Leg (1.5mm to 3mm) ID Tubing
		T1169018-N01-006 T1169018-PP00-004 T1169018-KY01-000	White Nylon Animal Free Polypropylene Kynar
 		T18L116	Tee Reducing Connector with 1/8" Barbs to 1/16" Barbed Leg (3mm to 1.5mm) ID Tubing
		T18L116-N01-006 T18L116-PP00-004 T18L116-KY01-000	White Nylon Animal Free Polypropylene Kynar
 		T18L332	Tee Reducing Connector with 1/8" Barbs to 3/32" Barbed Leg (3mm to 2.25mm) ID Tubing
		T18L332-N01-006 T18L332-PP00-004 T18L332-KY01-000	White Nylon Animal Free Polypropylene Kynar

Tee Reducing Connectors

Component	Cross Section	Part Number	Description
		T14L332 T14L332-N00-006 T14L332-PP00-004 T14L332-KY01-000	Tee Reducing Connector with 1/4" Barbs to 3/32" Barbed Leg (6.25mm to 2.25mm) ID Tubing Natural Nylon Animal Free Polypropylene Kynar
		T14L18 T14L18-N00-006 T14L18-PP00-004 T14L18-KY01-000	Tee Reducing Connector with 1/4" Barbs to 1/8" Barbed Leg (6.25mm to 3mm) ID Tubing Natural Nylon Animal Free Polypropylene Kynar
		T14L316 T14L316-N00-006 T14L316-PP00-004 T14L316-KY01-000	Tee Reducing Connector with 1/4" Barbs to 3/16" Barbed Leg (6.25mm to 4.75mm) ID Tubing Natural Nylon Animal Free Polypropylene Kynar



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene

KY01-000 | Kynar

ABS00-002 | Clear ABS



Multiple color options available for Nylon components. Subject to minimum order quantities.



Tee Reducing Connectors

Component	Cross Section	Part Number	Description
 		T18R116	Asymmetric Tee Reducing Connector with 1/8" Barbs to 1/16" Barb (3mm to 1.5mm) ID Tubing
		T18R116-N01-006 T18R116-PP00-004 T18R116-KY01-000	White Nylon Animal Free Polypropylene Kynar
 		T18R332	Asymmetric Tee Reducing Connector with 1/8" Barbs to 3/32" Barb (3mm to 2.25mm) ID Tubing
		T18R332-N01-006 T18R332-PP00-004 T18R332-KY01-000	White Nylon Animal Free Polypropylene Kynar
 		CP031	Barbed Tee Reducing Connector for 3/32", 1/8" and 3/16" (2.25mm, 3mm and 4.75mm) ID Tubing
		CP031-ABS01-001	White ABS

Samples are available

Please contact us for samples to test in your application.

Y Connectors

Component	Cross Section	Part Number	Description
		Y116 Y116-N01-006 Y116-PP00-004 Y116-KY01-000	Y Connector with 1/16" Barbs (1.5mm) ID Tubing White Nylon Animal Free Polypropylene Kynar
		Y332 Y332-N01-006 Y332-PP00-004 Y332-KY01-000	Y Connector with 3/32" Barbs (2.25mm) ID Tubing White Nylon Animal Free Polypropylene Kynar
		Y18 Y18-N01-006 Y18-PP00-004 Y18-KY01-000	Y Connector with 1/8" Barbs (3mm) ID Tubing White Nylon Animal Free Polypropylene Kynar



Animal Derivative Free Materials:

PP00-004 | Animal Free Polypropylene



KY01-000 | Kynar

ABS00-002 | Clear ABS




Multiple color options available for Nylon components. Subject to minimum order quantities.

Y Connectors

Component	Cross Section	Part Number	Description
		Y532 Y532-N01-006 Y532-PP00-004 Y532-KY01-000	Y Connector with 5/32" Barbs (4mm) ID Tubing White Nylon Animal Free Polypropylene Kynar
		Y316 Y316-N01-006 Y316-PP00-004 Y316-KY01-000	Y Connector with 3/16" Barbs (4.75mm) ID Tubing White Nylon Animal Free Polypropylene Kynar

When quality counts, you can trust the reliable products Injectech supplies.

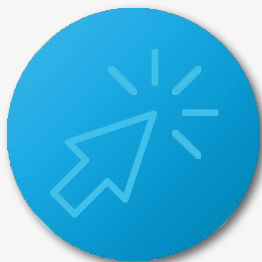



Technical Information

Useful guides to help our customers make informed choices.

Guides, Specifications and Charts

- Chemical Resistance Chart
- Material Properties
- Conversion Charts
- Barb Dimensions
- Index
- Terms & Conditions

Resistance Chart

Key:

EX | Excellent

SA | Satisfactory

UN | Unsatisfactory

Chemical Resistance of Resin

Chemical	%	Temp °C	Temp °F	ABS	PVDF	Nylon	Polycarbonate	Polypropylene
Acetic Acid	5	23	73	EX	EX	SA	SA	EX
Acetone	100	50	122	UN	UN	SA	UN	EX
Acetophenone	100	24	75	SA	UN	EX	—	SA
Acetylene	100	24	75	-	EX	EX	—	—
Air	100	82	180	EX	EX	EX	—	—
Ammonia, Liquid	100	24	75	SA	UN	SA	UN	EX
Ammonium Hydroxide	10	23	73	SA	EX	EX	UN	EX
Ammonium Hydroxide	10	70	158	UN	EX	UN	UN	EX
Barium Sulfide	100	24	75	EX	EX	SA	—	EX
Benzene	100	23	73	SA	EX	EX	UN	SA
Bleach	100	23	73	-	EX	SA	UN	SA
Boric Acid	7	35	95	EX	EX	UN	EX	EX
Calcium Carbonate	Sat sol.	24	75	EX	EX	—	—	EX
Carbon Dioxide	100	50	122	SA	EX	EX	—	EX
Carbon Monoxide	100	50	122	SA	EX	EX	—	EX
Carbon Tetrachloride	100	50	122	UN	EX	EX	UN	UN
Chlorine Water Dilute	Dilute	23	73	UN	EX	SA	UN	UN
Chlorine Water Concen.	Concen.	23	73	UN	EX	UN	UN	UN
Chlorobenzene	100	23	73	SA	EX	EX	UN	UN
Chlorofluorocarbon 11	100	24	75	-	EX	EX	SA	—
Chloroform	100	23	73	UN	EX	SA	UN	UN
Cyclohexanone	100	24	75	UN	EX	EX	UN	SA
Dichlorethylene	100	23	73	-	EX	SA	—	EX
Ethanol	95	50	122	SA	EX	EX	SA	EX
Ethyl Acetate	95	50	122	SA	UN	EX	UN	SA
Ethylene Glycol	100	23	73	EX	EX	EX	SA	EX
Ethylene Oxide	100	24	75	UN	EX	SA	SA	SA
Ethylene Oxide	100	79	175	UN	EX	UN	SA	UN
Fatty Acids	-	-	-	-	EX	—	SA	EX
Fluorine	100	23	73	UN	EX	UN	—	—

For reference only | Please test in your application.

Key:

EX | Excellent

SA | Satisfactory

UN | Unsatisfactory

Chemical Resistance of Resin

Chemical	%	Temp °C	Temp °F	ABS	PVDF	Nylon	Polycarbonate	Polypropylene
Formaldehyde	37	24	75	UN	EX	—	UN	EX
Gasoline	100	85	185	EX	EX	EX	UN	SA
Glucose	Concen.	24	75	EX	EX	—	—	EX
Glycerin	100	24	75	EX	EX	—	EX	EX
Hydrochloric Acid	2	23	73	EX	EX	EX	EX	EX
Hydrochloric Acid	10	25	77	EX	EX	UN	EX	EX
Hydrofluoric Acid	10	23	73	SA	EX	UN	—	EX
Hydrogen Peroxide	1	24	75	EX	EX	SA	EX	EX
Hydrogen Peroxide	5	43	110	SA	EX	UN	EX	SA
Isopropanol	70	23	73	—	EX	EX	—	EX
Kerosene	100	85	185	SA	EX	EX	SA	SA
Methyl Ethyl Ketone	100	50	122	UN	UN	EX	UN	SA
Methylene Chloride	100	23	73	UN	EX	SA	UN	EX
Methanol	100	23	73	UN	EX	EX	SA	EX
Nitric Acid	10	23	73	SA	EX	UN	UN	EX
Oxygen	100	24	75	—	EX	SA	—	—
Ozone	100	43	110	SA	SA	UN	UN	—
Phenol	90	23	73	UN	EX	UN	—	EX
Phosphoric Acid	5	98	208	SA	EX	UN	UN	EX
Propane	100	23	73	SA	EX	EX	—	—
Sodium Bicarbonate	Concen.	24	75	EX	EX	EX	—	EX
Sodium Chloride	10	23	73	EX	EX	EX	—	EX
Sodium Chloride	Sat sol.	24	75	EX	EX	EX	—	EX
Sodium Hydroxide	10	70	158	SA	EX	SA	—	EX
Steam	-	120	248	UN	EX	UN	UN	SA
Sulfuric Acid	30	23	73	SA	EX	UN	EX	EX
Tetrahydrofuran	100	23	73	SA	UN	EX	—	UN
Toluene	100	50	122	SA	EX	EX	UN	UN
Trichloroethylene	100	23	73	SA	EX	SA	UN	UN
Water	100	79	175	EX	EX	EX	UN	EX

For reference only | Please test in your application.



Material Properties



Polycarbonate | PC01-000

Polycarbonate is a clear material, which makes it desirable for many clinical and diagnostic applications. It has a higher impact strength than nylon, acrylic or ABS. It is a commonly used material for sunglass lenses due to its abrasion resistance and superior optical qualities. Polycarbonate is chemical resistant, but some oils and solvents will cause it to stress crack. It has excellent bonding characteristics; however, when solvents are used for assembly, it may be necessary to anneal the components prior to solvent bonding. Polycarbonate is used in: IV components, cardiac surgery and general medical applications.

Sterilization

Polycarbonate has sufficient temperature resistance to allow autoclave sterilization, but is not suited to repeated cycles. It is also compatible with gamma and EtO (Ethylene Oxide) sterilization methods.

Classifications

- Meets Requirements for USP Class VI, ISO 10993-1, and FDA 21 CFR 177.1500
- RoHS Compliant
- DEHP Free
- Phthalate Free
- Conflict Mineral Compliant
- Human Derivative Free

Radiation Stable Polycarbonate | RSPC01-005

Radiation Stable Polycarbonate has the same properties as standard polycarbonate, but is formulated with stabilizing additives that increase its resistance to gamma radiation. The formulation includes an indicator pigment that changes from light purple to clear when the parts have undergone gamma sterilization.

Sterilization

RSPC can withstand radiation doses in the range of 100 kGy (see Polycarbonate).

Classifications

- Meets Requirements for USP Class VI
- Meets Requirements for ISO 10993
- RoHS Compliant
- DEHP Free
- REACH Compliant
- Phthalate Free
- Latex Free
- Conflict Mineral Compliant
- Ozone Depleting Substances Compliant
- California Prop. 65 Compliant

Disclaimer | The material properties information has been provided to us by resin manufacturers and other sources believed to be reliable; however, application specific variables can affect the performance of all materials. Therefore, Injectech makes no claims or guarantees based upon the materials information provided and strongly encourages customers to sample and test Injectech products within the application environment.

Lipid Resistant Radiation Stable Polycarbonate | RSPC01-001

In addition to radiation tolerance, Lipid Resistant Radiation Stable Polycarbonate is less affected by oils and fats, which can occasionally cause crazing in other polycarbonate formulations.

Sterilization

Lipid Resistant Radiation Polycarbonate can withstand radiation doses in the range of 100kGy (see Polycarbonate).

Classifications

- Meets Requirements for USP Class VI
- Meets Requirements for ISO 10993
- RoHS Compliant
- DEHP Free
- Animal Derivative Free
- REACH Compliant
- Phthalate Free
- Human Derivative Free

Acrylonitrile Butadiene Styrene (ABS) | ABS01-001

ABS is a low cost, impact resistant material that typically produces a glossy, impervious surface. ABS polymers are resistant to aqueous acids, alkalis, concentrated hydrochloric and phosphoric acids, and animal, vegetable and mineral oils. ABS is an ideal material for structural applications where impact resistance, strength, and stiffness are required. Athletic helmets and Legos blocks are common examples of products manufactured from ABS.

Sterilization

ABS is compatible with EtO (Ethylene Oxide) sterilization, but is not compatible with autoclave or gamma sterilization.

Classifications

- Meets Requirements for USP Class VI, ISO 10993-1, and FDA 21 CFR 181.32
- Conflict Mineral Compliant
- RoHS Compliant

Methyl Methacrylate Acrylonitrile Butadiene Styrene (MABS) | ABS00-002 & ABS00-003

With similar characteristics to ABS01-001 White, ABS00-002 Clear is used to produce many of our male and female luer.

Classifications

- Meets Requirements for USP Class VI, FDA 21 CFR 181.32
- Conflict Mineral Compliant
- DEHP Free
- RoHS Compliant
- Animal Derivative Free
- Human Derivative Free
- REACH Compliant
- California Prop. 65 Compliant
- BPA Free
- Phthalate Free
- Latex Free

Disclaimer | The material properties information has been provided to us by resin manufacturers and other sources believed to be reliable; however, application specific variables can affect the performance of all materials. Therefore, Injectech makes no claims or guarantees based upon the materials information provided and strongly encourages customers to sample and test Injectech products within the application environment.

Material Properties

Nylon | N01-006

Nylon is a widely used medical polymer due to its strength / impact resistance, relatively low cost and wide temperature resistance range (-50 °C - 135 °C). Nylon is resistant to a wide range of chemicals, but is vulnerable to attack by strong acids and oxidizers.

Sterilization

Nylon is compatible with EtO (Ethylene Oxide) sterilization and can withstand gamma sterilization (to 50 kGy). It does have a tendency to discolor with increased doses of gamma radiation. Nylon may also be autoclaved; however, it is a hygroscopic material and may swell when exposed to moist environments.

Classifications

- Meets Requirements for FDA 21 CFR 177.1500
- RoHS Compliant
- REACH Compliant
- Phthalate Free
- BPA Free
- Ozone Depleting Substances Compliant
- California Prop. 65 Compliant

Natural Nylon | N00-006

With similar characteristics to N01-000, N00-006 is used to produce many of our larger sized tube to tube connectors.

Classifications

- Meets Requirements for FDA 21 CFR 177.1500
- RoHS Compliant
- REACH Compliant
- Phthalate Free
- BPA Free
- Ozone Depleting Substances Compliant
- California Prop. 65 Compliant

Acrylic | ACRL00-004

Acrylic is used for molding and extrusion of medical applications. It has excellent chemical resistance to fats and oils, bonding and welding capabilities, bonding to PVC tubing, excellent impact strength, and light transmission. Acrylic also has good melt flow rate and heat resistance.

Sterilization

Acrylic is compatible with EtO (Ethylene Oxide), gamma, and E-beam sterilization.

Classifications

- Meets Requirements for USP Class VI and ISO 10993
- RoHS Compliant
- REACH Compliant
- Phthalate Free
- BPA Free
- Conflict Mineral Compliant
- Latex Free
- DEHP Free

Disclaimer | The material properties information has been provided to us by resin manufacturers and other sources believed to be reliable; however, application specific variables can affect the performance of all materials. Therefore, Injectech makes no claims or guarantees based upon the materials information provided and strongly encourages customers to sample and test Injectech products within the application environment.

Kynar (PDVF - Polyvinylidene Flouride) | KY01-000

Kynar is a high-strength, high-purity resin that is resistant to solvents, acids, bases and deionized water. It exhibits a high tolerance for heat and is animal derivative free. Due to its chemical resistance and adaptability to multiple sterilization techniques, it is highly suited to many bioprocess, pharmaceutical and medical applications.

Sterilization

Kynar is compatible with sterilization by autoclave, high doses of gamma radiation and EtO (Ethylene Oxide).

Classifications

- Meets Requirements for USP Class VI
- Animal Derivative Free
- RoHS Compliant
- REACH Compliant
- BPA Free
- DEHP Free
- Phthalate Free
- Latex Free
- Ozone Depleting Substances Compliant
- Conflict Mineral Compliant

Polypropylene (Animal Free) | PP00-004

Injectech uses an animal derivative free grade of propylene for all of its stock polypropylene products. This grade of polypropylene is formulated for use in medical, biomedical and bioprocess applications and is resistant to a broad spectrum of solvents and chemicals.

Sterilization

Polypropylene is highly compatible with EtO (Ethylene Oxide) sterilization and is compatible with gamma sterilization in the range of 35-40 kGy (higher doses may produce a slight color shift). It may be autoclaved for up to 20 minutes @ 121 °C; however, since the material softens at this temperature, caution must be exercised when loading the autoclave to avoid any stresses that could deform the connector.

Classifications

- Meets Requirements for USP Class VI, ISO 10993-5, and FDA 21 CFR 177.1500
- Animal Derivative Free
- RoHS Compliant
- REACH Compliant
- Ozone Depleting Substances Compliant
- Phthalate Free
- Conflict Mineral Compliant
- California Prop. 65 Compliant
- BPA Free
- Latex Free
- DEHP Free

Eastman Tritan™ Copolyester | COPE00-000

The clear copolyester used by Injectech is proudly supplied by Eastman Chemical Company. Eastman's Tritan™ Copolyester is a tough, clear polymer that delivers best-in-class chemical resistance. It helps manufacturers of intravenous (IV) components differentiate their products in the marketplace while improving user satisfaction and confidence. It has excellent solvent bonding, adhesive bonding, and welding as well as low extractables. Tritan™ Copolyester also has great chemical resistance to oncology drugs, drug carrier solvents, enteral feeding solutions, and lipids.

Sterilization

Tritan™ Copolyester is compatible with EtO (Ethylene Oxide) sterilization, gamma sterilization, and e-beam irradiation. Unlike many other polymers, Tritan™ does not suffer color shifting or loss of properties following nonautoclave sterilization methods such as gamma or electron beam (e-beam) radiation.

Classifications

- Meets Requirements for - USP Class VI - ISO 10993-5
- Animal Derivative Free
- Antioxidant Free
- RoHS Compliant
- BPA Free
- DEHP Free

Disclaimer | The material properties information has been provided to us by resin manufacturers and other sources believed to be reliable; however, application specific variables can affect the performance of all materials. Therefore, Injectech makes no claims or guarantees based upon the materials information provided and strongly encourages customers to sample and test Injectech products within the application environment.

Conversion Charts

Flow Rate Conversions

cc/min	x 1 =	ml/min	/ 1 =	cc/min
cf/min (ft ³ /min)	x 28.31 =	l/min	/ 28.31 =	cf/min (ft ³ /min)
cf/min (ft ³ /min)	x 1.699 =	m ³ /hr	/ 1.699 =	cf/min (ft ³ /min)
cf/hr (ft ³ /hr)	x 472 =	ml/min	/ 472 =	cf/hr (ft ³ /hr)
cf/hr (ft ³ /hr)	x 0.125 =	g/min	/ 0.125 =	cf/hr (ft ³ /hr)
gal/hr	x 63.1 =	ml/min	/ 63.1 =	gal/hr
gal/hr	x 0.134 =	cf/hr	/ 0.134 =	gal/hr
gal/min	x 0.227 =	m ³ /hr	/ 0.227 =	gal/min
gal/min	x 3.785 =	l/min	/ 3.785 =	gal/min
oz/min	x 29.57 =	ml/min	/ 29.57 =	oz/min

Length Conversions

inch	x 2.54 =	cm	/ 2.54 =	inch
foot	x 12 =	inch	/ 12 =	inch
foot	x 0.305 =	m	/ 0.305 =	foot
yard	x 1.094 =	m	/ 1.094 =	yard
angstrom	x 1010 =	m	/ 1010 =	angstrom

Pressure/Vacuum Conversions

atm	x 33.9 =	ft H ₂ O	/ 33.9 =	atm
atm	x 760 =	mm Hg	/ 760 =	atm
atm	x 1033.2 =	g/cm ²	/ 1033.2 =	atm
atm	x 14.70 =	psi	/ 14.70 =	atm
atm	x 1.013 =	bar	/ 1.013 =	atm
atm	x 101.3 =	kPa	/ 101.3 =	atm
bar	x 14.5 =	psi	/ 14.5 =	bar
bar	x 0.9869 =	atm	/ 0.9869 =	bar
bar	x 100 =	kPa	/ 100 =	bar
ft H ₂ O	x 0.4335 =	psi	/ 0.4335 =	ft H ₂ O
kPa	x 10000 =	dyne/cm ²	/ 10000 =	kPa
kPa	x 0.1450 =	psi	/ 0.1450 =	psi
kPa	x 7.5 =	mm Hg	/ 7.5 =	kPa
psi	x 0.0703 =	kg/cm ²	/ 0.0703 =	psi

Metric Conversions

1 centimeter	.3937 inches
1 inch	2.54 centimeters
1 foot	30.48 centimeters
1 square centimeter	.1550 sq. inches
1 square inch	6.452 sq. centimeters
1 cubic centimeter	.061 cubic inches
1 cubic inch	16.39 cubic centimeters
1 liter	61.02 cubic inches
1 liter	1.057 quarts
1 quart	.946 liters
1 ounce	28.35 grams
1 gram	.0352 ounces
1 gram	.0022 lbs.
1 pound per square inch	.0703 kilograms per sq. centimeter
1 kilogram per square centimeter	14.22 lbs. per sq. in.
1 millimeter	.0393 inches

Weight and Measure Conversions

1 foot	12 inches
1 foot of water	.434 lbs. per sq. inch
1 inch of mercury	1.133 feet of water
1 atmosphere	29.92 inches of mercury
1 atmosphere	14.7 lbs. per sq. inch
1 pound per square inch	2.036 inches of mercury
1 pound (advp)	16 ounces
1 gallon	4 quarts
1 quart	2 pints
1 pint	20 ounces
1 gallon	277 cubic inches
1 square foot	144 sq. inches
1 cubic foot	1,728 cubic inches



Conversion Charts

Temperature Conversions																	
°C	Temp	°F	°C	Temp	°F	°C	Temp	°F	°C	Temp	°F	°C	Temp	°F	°C	Temp	°F
-17.8	0	32.0	-1.1	30	86.0	15.6	60	140.0	32.2	90	194.0	143	290	554	310	590	1094
-17.2	1	33.8	-0.6	31	87.8	16.1	61	141.8	32.8	91	195.8	149	300	572	316	600	1112
-16.7	2	35.6	0	32	89.6	16.7	62	143.6	33.3	92	197.6	154	310	590	321	610	1130
-16.1	3	37.4	0.6	33	91.4	17.2	63	145.4	33.9	93	199.4	160	320	608	327	620	1148
-15.6	4	39.2	1.1	34	93.2	17.8	64	147.2	34.4	94	201.2	166	330	626	332	630	1166
-15.0	5	41.0	1.7	35	95.0	18.3	65	149.0	35.0	95	203.0	171	340	644	338	640	1184
-14.4	6	42.8	2.2	36	96.8	18.9	66	150.8	35.6	96	204.8	177	350	662	343	650	1202
-13.9	7	44.6	2.8	37	98.6	19.4	67	152.6	36.1	97	206.6	182	360	680	349	660	1220
-13.3	8	46.4	3.3	38	100.4	20.0	68	154.4	36.7	98	208.4	188	370	698	354	670	1238
-12.8	9	48.2	3.9	39	102.2	20.6	69	156.2	37.2	99	210.2	193	380	716	360	680	1256
-12.2	10	50.0	4.4	40	104.0	21.1	70	158.0	38	100	212	199	390	734	366	690	1274
-11.7	11	51.8	5.0	41	105.8	21.7	71	159.8	43	110	230	204	400	752	371	700	1292
-11.1	12	53.6	5.6	42	107.6	22.2	72	161.6	49	120	248	210	410	770	377	710	1310
-10.6	13	55.4	6.1	43	109.4	22.8	73	163.4	54	130	266	216	420	788	382	720	1328
-10.0	14	57.2	6.7	44	111.2	23.3	74	165.2	60	140	284	221	430	806	388	730	1346
-9.4	15	59.0	7.2	45	113.0	23.9	75	167.0	66	150	302	227	440	824	393	740	1364
-8.9	16	60.8	7.7	46	114.8	24.4	76	168.8	71	160	320	232	450	842	399	750	1382
-8.3	17	62.6	8.3	47	116.6	25.0	77	170.6	77	170	338	238	460	860	404	760	1400
-7.8	18	64.4	8.9	48	118.4	25.6	78	172.4	82	180	356	243	470	878	410	770	1418
-7.2	19	66.2	9.4	49	120.2	26.1	79	174.2	88	190	374	249	480	896	416	780	1436
-6.7	20	68.0	10.0	50	122.0	26.7	80	176.0	93	200	392	254	490	914	421	790	1454
-6.1	21	69.8	10.6	51	123.8	27.2	81	177.8	99	210	410	260	500	932	427	800	1472
-5.6	22	71.6	11.1	52	125.6	27.8	82	179.6	100	212	413	266	510	950	432	810	1490
-5.0	23	73.4	11.7	53	127.4	28.3	83	181.4	104	220	428	271	520	968	438	820	1508
-4.4	24	75.2	12.2	54	129.2	28.9	84	183.2	110	230	446	277	530	986	443	830	1526
-3.9	25	77.0	12.8	55	131.0	29.4	85	185.0	116	240	464	282	540	1004	449	840	1544
-3.3	26	78.8	13.3	56	132.8	30.0	86	186.8	121	250	482	288	550	1022	454	850	1562
-2.8	27	80.6	13.9	57	134.6	30.6	87	188.6	127	260	500	293	560	1040	460	860	1580
-2.2	28	82.4	14.4	58	136.4	31.1	88	190.4	132	270	518	299	570	1058	466	870	1598
-1.7	29	84.2	15.0	59	138.2	31.7	89	192.2	138	280	536	304	580	1076	471	880	1616

Use | Begin in the column labeled **'Temp'** with the temperature that you need to convert (either Farenheit or Celcius).

- To convert from Farenheit to Celcius: read the equivalent value in the column to the left.
- To convert from Celcius to Farenheit: read the equivalent value in the column to the right.

Volume Conversions

cubic cm (cc)	x 1 =	ml	/ 1 =	cubic cm (cc)
oz (fluid)	x 29.57 =	ml	/ 29.57 =	oz (fluid)
cubic ft (ft ³)	x 7.48 =	gal	/ 7.48 =	cubic ft (ft ³)
cubic ft (ft ³)	x 0.0283 =	m ³	/ 0.0283 =	cubic ft (ft ³)
cubic meters	x 1000 =	liters	/ 1000 =	cubic meters
gal	x 128 =	oz (fl)	/ 128 =	gal
gal	x 3.785 =	liters	/ 3.785 =	gal
gal	x 0.8333 =	imp gal	/ 0.8333 =	gal
quart	x 0.25 =	gal	/ 0.25 =	quart
quart	x 0.9464 =	liters	/ 0.9464 =	quart
cup	x 236.59 =	mL	/ 236.59 =	cup
cup	x 8 =	oz (fl)	/ 8 =	cup
pint	x 0.125 =	gal	/ 0.125 =	pint
pint	x 0.4732 =	liters	/ 0.4732 =	pint
bushel	x 9.3092 =	gal	/ 9.3092 =	bushel
bushel	x 35.239 =	liters	/ 35.239 =	bushel
bushel	x 64 =	pints (fl)	/ 64 =	bushel

Providing your Project with Support from Start to Finish

Injectech has an established reputation for flexible manufacturing. We offer our customers a number of specialized services. We are equipped to manage all stages of project development from design and engineering to verification and validation.

Don't see the fitting you need for your project? Contact us to find out how we can assist you. Along with our established line of plastic barbed fittings, Injectech can also produce custom components to meet your needs. We provide:



Manufacturing

- Lot-traceable materials
- ISO Class 8 cleanroom
- ISO 13485 certified
- All electric injection presses
- Automated processes



Custom Design

- Prototype machining and molding
- Design support and consulting
- Production molds
- Material sourcing



Engineering

- Custom molding
- First article inspection reports
- Thorough part qualification
- Functional and dimensional verifications



Assembly

- Solvent and adhesive bonding
- Cleanroom assembly
- Component sourcing
- Molding analysis



Barb Dimensions




Standard Barb

Barb Size	Barb OD
1/32"	0.066
1/16"	0.094
3/32"	0.141
1/8"	0.188
5/32"	0.234
3/16"	0.282
1/4"	0.388



Rigid Barb

Barb Size	Barb OD
1/16"	0.078
3/32"	0.117
1/8"	0.156
3/16"	0.234

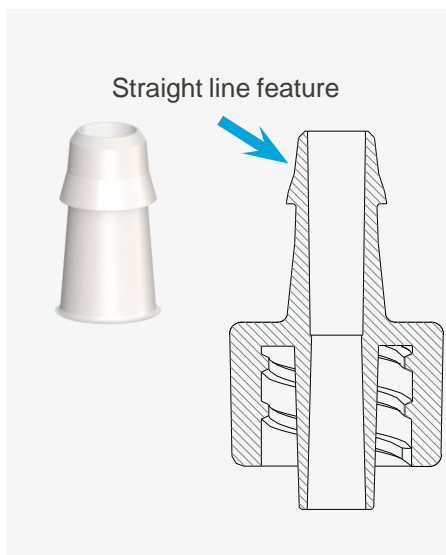

High Flow Barb

Barb Size	Barb OD
1/8"	0.164
5/32"	0.208
3/16"	0.264
1/4"	0.335

Index

01116.....	50	03R532.....	59
0118.....	51	03R532CP.....	61
01332.....	50	04116.....	30
02116.....	39	0414.....	35
0214.....	44	0418.....	32
0218.....	41	04316.....	34
02316.....	43	04332.....	31
02332.....	40	04532.....	33
02532.....	42	04B095.....	21, 37
02B062.....	23, 46	04B110.....	21, 37
02B085.....	23, 46	04B130.....	21, 37
02B104.....	23, 46	04B187.....	22, 38
02B130.....	24, 47	04B312.....	22, 38
02B156.....	24, 47	04HF14CP.....	28, 35
02B187.....	24, 47	04HF18.....	27, 32
02G116.....	49	04HF316CP.....	27, 34
02G18.....	49	04HF532CP.....	27, 33
02G332.....	49	04P.....	55
02HF14.....	29, 44	04PCL.....	55
02HF18.....	28, 41	04R116.....	25, 30
02HF316.....	29, 43	04R316.....	25, 34
02HF332SB.....	40	04R332.....	25, 31
02HF532.....	28, 42	70214.....	20, 45
02P.....	53	70218.....	19, 41
02R116.....	26, 39	702116.....	19, 39
02STY.....	53	702316.....	20, 44
03116.....	51	702332.....	19, 40
0318.....	52	702532.....	20, 43
03332.....	51	70414.....	18, 36
03R02C.....	58	70418.....	17, 32
03R116.....	58	704116.....	17, 30
03R14.....	60	704316.....	18, 35
03R14CP.....	61	704332.....	17, 31
03R18.....	59	704532.....	18, 33
03R316.....	59	7C0303.....	54
03R316CP.....	61	A03R02C.....	62
03R332.....	58	A03R116.....	62

Index

A03R14	64	CRING.....	67
A03R14CP	65	CV0001.....	71
A03R18	63	CV0004.....	71
A03R316	64	CV0005.....	71
A03R316CP	65	CV0006.....	72
A03R332	63	CV0007.....	72
A03R532	63	CV116.....	78
A03R532CP	64	CV116R18.....	79
C0101	53	CV116R332.....	79
C0202	54	CV18	78
C0303	54	CV18R116.....	80
C116R132	102	CV18R332.....	80
C14R18	101	CV332.....	78
C14R316	102	CV332R116.....	79
C14R532	102	CV332R18.....	80
C18R116	98	CV70202	77
C18R332	99	CV702116.....	75
C316R18	101	CV70218	76
C316R332	100	CV702332.....	75
C316R532	101	CV70402	77
C332R116	98	CV704116.....	73
C532R18	100	CV70418	74
C532R332	100	CV704332.....	73
CP024	69	F116	92
CP026	69	F18.....	92
CP027	69	F18R116	93
CP029	56	F18R332	93
CP030	52	F332	92
CP031	112	F332R116	93
CP033	42	F70202.....	91
CP120	56	F702116.....	90
CP142	56	F70218	90
CR116.....	95	F702332.....	90
CR18	96	F70402.....	91
CR18R116.....	99	F704116.....	89
CR18R332.....	99	F70418	89
CR332.....	96	F704332.....	89
CR332R116	98	FCV116.....	86

Index

FCV116R18.....	87	LR116	103
FCV116R332.....	87	LR18.....	104
FCV18	86	PM702116	67
FCV18R116.....	88	PM70218.....	67
FCV18R332.....	88	PM702332	67
FCV332.....	86	PMNUT.....	67
FCV332R116.....	87	RCV702116.....	75
FCV332R18.....	88	RCV70218	76
FCV70202	85	RCV702332.....	76
FCV702116	83	RCV70402	77
FCV70218	84	RCV704116.....	73
FCV702332	83	RCV70418	74
FCV70402	85	RCV704332.....	74
FCV704116	81	RFCV702116.....	83
FCV70418	82	RFCV70218.....	84
FCV704332	81	RFCV702332.....	84
IC116.....	95	RFCV70402.....	85
IC14	97	RFCV704116.....	81
IC18	96	RFCV70418.....	82
IC316.....	97	RFCV704332.....	82
IC332.....	95	RSR	62
IC532.....	97	S01332	50
IL116	103	S03332	52
IL14.....	105	T010101.....	57
IL14R18	106	T1169018	110
IL18.....	104	T14L18	111
IL316	105	T14L316	111
IL332	103	T14L332	111
IL532	105	T18L116	110
IT116	107	T18L332	110
IT14	109	T18R116	112
IT18	107	T18R332	112
IT316	108	TR18	108
IT332	107	Y116	113
IT532	108	Y18.....	113
L0103	55	Y316	114
L03R18.....	60	Y332	113
L332.....	104	Y532	114

Terms and Conditions

These Terms and Conditions of Sale are subject to change without notice.

AGREEMENT. Buyer accepts these Terms and Conditions of Sale ("Terms and Conditions") by (a) executing a separate agreement with Injectech, LLC ("Injectech") which incorporates these terms and conditions, (b) delivering a purchase order for Injectech products or services ("Products") with specifications, quantities, delivery dates and other terms acceptable to Injectech, (c) accepting delivery of the Products, or (d) paying the price for the Products, whether prior to delivery or not, as agreed to by the parties and/or set forth in the quote or invoice, whichever comes first.

PAYMENT TERMS. Net 14 days from receipt on open account, subject to approval. Visa, MasterCard and American Express are also accepted. Buyer agrees to be solely liable for any and all taxes arising out of Buyer's purchase of Products and sale of such Products to its customers. Injectech will add sales, use and other taxes as required by law.

MINIMUM ORDER. Please contact us for minimum order quantity requirements.

DELIVERY AND SHIPMENT. All domestic shipments shall be F.O.B. Injectech's facility, Fort Collins, Colorado. All international shipments shall be EXW Injectech's facility, Fort Collins, Colorado (Incoterms 2000). Risk of loss shall transfer to Buyer upon delivery to the freight carrier. A Packaging/Handling fee will be applied as a percentage of the total invoice amount.

INSPECTION/ACCEPTANCE OF PRODUCTS. Buyer shall be responsible for inspecting all Products prior to acceptance. If the products are rejected, Injectech must receive written notice within 30 days of delivery. Otherwise, the Products shall be deemed to have been accepted by the Buyer. Injectech does not perform C=0 inspections unless specified by customers or agreed by both parties. Standard inspection criteria are based in the latest revision of WI 8.2.2 and/or AQL 0.65 sampling plan.

LIMITED WARRANTY. Injectech does not specify or warrant any product it sells for any particular purpose, use or application. It is solely up to the purchaser to determine whether the Injectech product will function in the purchaser's application. Injectech warrants to Buyer that all Products shall be free from material defects in materials and workmanship. Injectech must receive all warranty claims no later than 3 months from the date of shipment. Buyer's exclusive remedy, and Injectech's sole liability, for any breach of the foregoing warranty shall be for Injectech, at its sole option, to repair, replace or modify the defective Product or to refund to Buyer the purchase price paid by Buyer for the defective Product. The warranty service shall be performed at a location determined by Injectech. In order to receive the warranty service, Buyer must return the defective Product within 30 days of notification from Buyer hereunder. All defective Products returned under this warranty that are replaced, or for which a refund is given to Buyer, shall become Injectech's property. Notwithstanding the foregoing, this limited warranty shall not apply if:

- (1) Product is altered or modified after delivery, including in Buyer's manufacturing or assembly process.
- (2) Any repairs or alterations have been performed by Buyer without prior notification to and authorization by Injectech.
- (3) Negligence, misuse, or abuse of the product by any party.

This limited warranty does not extend to products not manufactured by Injectech or to damages caused by purchased components, parts or supplies not manufactured by Injectech. **THE FOREGOING LIMITED WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES AND INJECTECH HEREBY EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, STATUTORY OR OTHERWISE, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF TITLE, NON-INFRINGEMENT AND IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT AND FITNESS FOR A PARTICULAR USE.**

FORCE MAJEURE. Injectech shall not be liable, directly or indirectly, for any delays or failures in performance resulting from causes beyond its reasonable control, including but not limited to, fire, acts of God or third parties, labor disputes or disturbances, shortage of raw materials, supplies or components, manufacturing issues, retooling, upgrading of technology, embargo, government regulation, order or directive, or communication or utility failures.

CANCELLED ORDERS. Cancellations of custom orders are subject to a cancellation fee based upon the amount of design, development and manufacturing at the time of cancellation.

RETURNED GOODS. A return authorization must be obtained from Injectech for Products that do not conform to our warranty statement. Injectech does not allow returns in regards to changes to specifications, customer errors, or shipping schedules once the Product has been shipped.

INDEMNIFICATION. Buyer shall indemnify and hold harmless Injectech and its affiliated companies and each of their respective officers, directors, employees, shareholders, agents and representatives from all losses, claims, damages, expenses or liabilities of any kind (including attorney's fees and court costs) resulting from or arising out of any use, modification, resale or transfer by Buyer of the Products. Buyer represents, warrants, and covenants that Buyer will not infringe or misappropriate, and neither the Products nor any element thereof will infringe or misappropriate, any intellectual property rights, including without limitation, any copyrights, trademarks, trade names, trade secrets and patent rights ("Intellectual Property Rights") of any other person as a result of any specifications provided by Buyer. Buyer will, at its own expense, indemnify, defend, hold harmless and pay any and all costs and damages awarded against Injectech based on any third-party claims that the Products infringe any Intellectual Property Rights. In the event of any third-party claim, demand, suit, or action (a "Claim") for which indemnification is required hereunder, the indemnified party may, at its option, require Buyer to defend such Claim at Buyer's sole expense. Buyer may not agree to settle any Claim without the express prior written consent of the indemnified party.

LIMITATIONS ON LIABILITY. INJECTECH SHALL NOT BE LIABLE FOR ANY LOSS OR DAMAGE CAUSED BY DELAY IN FURNISHING ANY PRODUCT. UNDER NO CIRCUMSTANCE SHALL INJECTECH BE LIABLE FOR ANY INDIRECT, CONSEQUENTIAL, COLLATERAL, SPECIAL, PUNITIVE, TREBLE, EXEMPLARY OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, LOSS OF PROFITS OR GOODWILL) WHETHER SUCH CLAIM IS BASED ON CONTRACT, NEGLIGENCE, TORT, WARRANTY OR ANY OTHER BASIS, IRRESPECTIVE OF WHETHER INJECTECH HAS BEEN ADVISED OF THE POSSIBILITY OF ANY SUCH LOSS OR DAMAGE. IN NO EVENT SHALL INJECTECH'S AGGREGATE LIABILITY EXCEED THE TOTAL AMOUNTS ACTUALLY PAID BY BUYER FOR THE PRODUCTS PURCHASED.

EXPORT REGULATIONS; PERMITS. Buyer is solely responsible for compliance with any and all applicable export control requirements, including the U.S. Export Administration Regulations, related documentation requirements and internal control procedures and regulations of the Office of Foreign Assets Control of the U.S. Department of the Treasury. Buyer shall be solely responsible for obtaining any necessary export control licenses and permits.

REGULATORY REQUIREMENTS. Injectech, LLC relies on the material suppliers, resin manufacturers, equipment, and chemical suppliers' regulatory information. We do not test or analyze these materials for any specified regulatory requirements; the information provided by the material suppliers, resin manufacturers, equipment, and chemical suppliers has been compiled in a readily retrievable format as a service to our customers. Ultimately customers and end-users must make their determinations ensuring the use of these products is safe, lawful, and suitable for their intended applications.

CHANGES. Injectech reserves the right to change, in whole or in part, at any time, prices, discounts, rebates, warranties, product specifications, products offered, policies and terms and conditions of sale, including these Terms and Conditions.

Product Change Notification Policy: Our policy is to notify customers for changes related to a product's form, fit or function. Injectech's products are our proprietary designs with which we serve many diverse customers and markets. Therefore, we will not withhold changes to standard parts pending customer approval.

APPLICABLE LAW; VENUE. These Terms and Conditions shall be governed by and construed in accordance with the laws of the State of Colorado. Any action at law, suit in equity, or judicial proceeding of any kind arising directly, indirectly, or otherwise in connection with, out of, related to or from these Terms and Conditions shall be litigated only in the state or federal courts located in the City and County of Denver, Colorado, and the parties waive any right they may have to challenge the jurisdiction of this court or seek to bring any action in any other forum, whether originally or by transfer, removal or change of venue.



Injectech proudly supplies fluid control components such as male luer locks, female luer locks, check valves, and tube to tube connectors to medical device OEMs, biomedical and pharmaceutical manufacturers, veterinary suppliers, and industrial businesses worldwide.

Our services not only include the manufacture of high quality plastic fittings, we also provide custom design and assembly. We maintain an ISO 13485 certified quality management system and all products are molded, assembled, and packaged within an ISO Class 8 cleanroom.

