

Rt™-2330 (highly polar phase; 90% biscyanopropyl/10% phenylcyanopropyl polysiloxane—not bonded)

- General purpose columns for *cis/trans* FAMES, dioxin isomers.
- Temperature range: 0°C to 275°C.
- Equivalent to USP G48 phase.

Rt™-2330 is one of the most polar capillary column stationary phases. Cyano groups on both sides of the polymer backbone give the phase a strong dipole moment and high selectivity for *cis/trans* compounds or compounds with conjugated double bonds. Highly polar columns typically exhibit poor column efficiencies, high bleed, and short column lifetimes when thermally cycled. To overcome some of these problems, we developed a surface treatment that is more compatible with the Rt™-2330 phase. In addition, our improved polymer produces columns with improved column efficiency and lower bleed.

Because the Rt™-2330 stationary phase is not bonded, it should not be solvent rinsed.

Rt™-2330 Columns (fused silica)

(90% biscyanopropyl/10% phenylcyanopropyl polysiloxane)

ID	df (μm)	temp. limits*	15-Meter	30-Meter	60-Meter	105-Meter
0.25mm	0.10	0 to 260/275°C	10705	10708	10711	10714
	0.20	0 to 260/275°C	10720	10723	10726	10729
0.32mm	0.10	0 to 260/275°C	10706	10709	10712	10715
	0.20	0 to 260/275°C	10721	10724	10727	10730
0.53mm	0.10	0 to 260/275°C	10707	10710	10713	
	0.20	0 to 260/275°C	10722	10725	10728	

ID	df (μm)	temp. limits	10-Meter	20-Meter	40-Meter
0.18mm	0.10	0 to 260/275°C	40701	40702	40703

*Maximum temperatures listed are for 15- and 30-meter lengths. Longer lengths may have a slightly reduced maximum temperature.

Rt™-2560 (highly polar phase; biscyanopropyl polysiloxane—not bonded)

- Application-specific column for *cis/trans* FAMES.
- Stable to 250°C.


Because the Rt™-2560 stationary phase is not bonded, it should not be solvent rinsed.

Rt™-2560 Column (fused silica)

(biscyanopropyl polysiloxane)

ID	df (μm)	temp. limits	100-Meter
0.25mm	0.20	20 to 250°C	13199

Rt™-2330 Structure



similar phases

DB-23, HP-23, SP-2330, SP-2380


Doing Dioxin Analysis?

Rtx®-Dioxin and Rtx®-Dioxin2 columns provide better resolution and higher maximum temperatures than conventional columns. See pages 84 and 83.

similar phases

SPB-2560, HP-88, Silar 10C, CP-Sil 88 FAME, CP-Sil 88

NLEA FAMES resolved on an Rt™-2560 column.

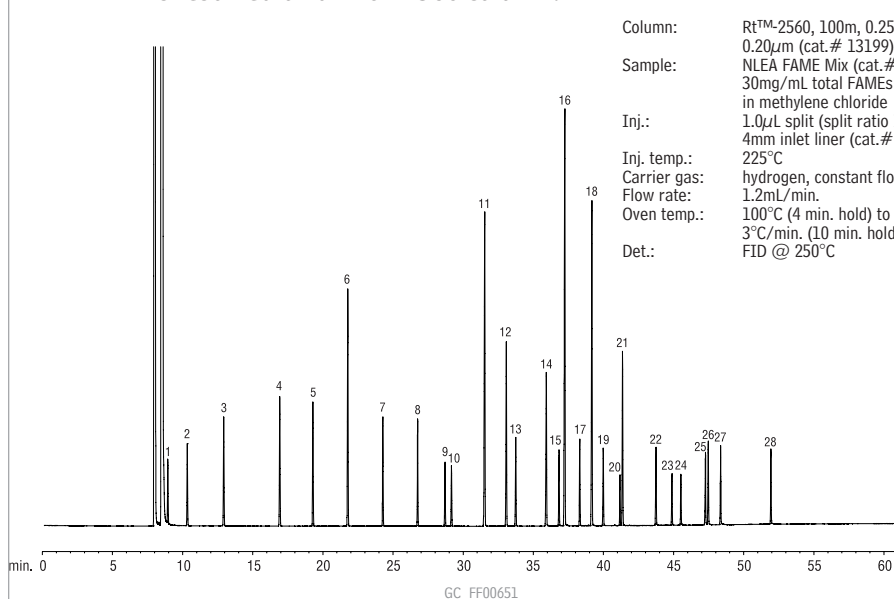

Column: Rt™-2560, 100m, 0.25mm ID, 0.20μm (cat.# 13199)
 Sample: NLEA FAME Mix (cat.# 35078), 30mg/mL total FAMES in methylene chloride
 Inj.: 1.0μL split (split ratio 100:1), 4mm inlet liner (cat.# 20814)
 Inj. temp.: 225°C
 Carrier gas: hydrogen, constant flow
 Flow rate: 1.2mL/min.
 Oven temp.: 100°C (4 min. hold) to 240°C @ 3°C/min. (10 min. hold)
 Det.: FID @ 250°C

1. C4:0 methyl butyrate
2. C6:0 methyl hexanoate
3. C8:0 methyl octanoate
4. C10:0 methyl decanoate
5. C11:0 methyl undecanoate
6. C12:0 methyl laurate
7. C13:0 methyl tridecanoate
8. C14:0 methyl myristate
9. C14:1 methyl myristoleate (*cis*-9)
10. C15:0 methyl pentadecanoate
11. C16:0 methyl palmitate
12. C16:1 methyl palmitoleate (*cis*-9)
13. C17:0 methyl heptadecanoate
14. C18:0 methyl stearate
15. C18:1 methyl elaidate (*trans*-9)
16. C18:1 methyl oleate (*cis*-9)
17. C18:2 methyl linoelaidate (*trans*-9,12)
18. C18:2 methyl linoleate (*cis*-9,12)
19. C20:0 methyl arachidate
20. C20:1 methyl eicosenoate (*cis*-11)
21. C18:3 methyl linolenate (*cis*-9,12,15)
22. C22:0 methyl behenate
23. C22:1 methyl erucate (*cis*-13)
24. C23:0 methyl tricosanoate
25. C24:0 methyl lignocerate
26. C20:5 methyl eicosapentaenoate (*cis*-5,8,11,14,17)
27. C24:1 methyl nervonate (*cis*-15)
28. C22:6 methyl docosahexaenoate (*cis*-4,7,10,13,16,19)